



MINING TIRES

MINING TIRES

LOADER / DOZER



GR 288 (L-2)



GR 288 (G-2/L-2) is a versatile bias-ply tire for graders or loaders. It is ideal for use in construction, site preparation, road building, and other soft or muddy environments. The self-cleaning tread pattern provides excellent traction, and you can expect a long tire life as a result of the special cut-and-chip-resistant compound.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 15.5 - 25	TL	12	-	STD	385	1270	572	3772	24.0	12.00/1.3	12.00/1.3 (DC)
17.5 - 25	TL	12	-	STD	445	1330	596	3950	25.5	14.00/1.5	14.00/1.5 (DC); 14.00/1.3 (DC)
17.5 - 25	TL	16	-	STD	445	1330	596	3950	25.5	14.00/1.5	14.00/1.3 (DC)
17.5 - 25	TL	20	-	STD	445	1330	596	3950	25.5	14.00/1.5	14.00/1.3 (DC)
17.5 - 25	TT	20	-	DB HD	445	1330	596	3950	25.5	14.00/1.5	14.00/1.3 (DC)
20.5 - 25	TL	16	-	STD	520	1480	656	4396	28.5	17.00/2.0	17.00/1.7
20.5 - 25	TL	20	-	STD	520	1480	656	4396	28.5	17.00/2.0	17.00/1.7
23.5 - 25	TL	16	-	STD	595	1610	708	4782	30.5	19.50/2.5	-
23.5 - 25	TL	20	-	STD	595	1610	708	4782	30.5	19.50/2.5	-

STD: Standard

DB HD: Dual Bead Heavy Duty Version



EARTHMAX SR 30 (L-3)



EARTHMAX SR 30 (E-3/L-3) is an All Steel radial tire which is dual-purposed for loaders and articulated dump trucks. The multi-layer steel belts and the rigid block pattern provide excellent traction, stability and durability. The special cut-resistant compound makes EARTHMAX SR 30 the ideal solution for a variety of harsh operating conditions.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM Rec./Flange Height Alt./Flange Height	
25" 17.5 R 25	TL	*	176 A2/167 B	CRC	446	1347	606	4021	29.0	14.00/1.5	14.00/1.3 (DC)
20.5 R 25	TL	*	186 A2/177 B	CRC	529	1487	663	4439	32.0	17.00/2.0	17.00/2.0 IF; 17.00/1.7
23.5 R 25	TL	*	195 A2/185 B	CRC	612	1607	711	4797	34.0	19.50/2.5	19.50/2.5 IF
26.5 R 25	TL	*	202 A2/193 B	CRC	689	1742	766	5200	38.0	22.00/3.0	22.00/3.0 IF
29.5 R 25	TL	*	208 A2/200 B	CRC	765	1861	818	5555	42.0	25.00/3.5	25.00/3.5 IF

CRC: Cut-resistant compound



Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference



LOADER GRIP (L-3)



LOADER GRIP (L-3) is a bias-ply tire specially designed for loaders. The tread compound provides cut-and-chip-resistant properties and suites best for loading and dozing operations.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 14.00 - 25	TT	20	-	STD	375	1368	630	4050	26.5	10.00/1.5	-
17.5 - 25	TT	12	-	STD	440	1345	622	3980	26.5	14.00/1.5	-
17.5 - 25	TT/TL	16	-	STD	440	1345	622	3980	26.5	14.00/1.5	-
17.5 - 25	TT	20	-	DB	440	1345	622	3980	26.5	14.00/1.5	-
20.5 - 25	TT/TL	16	-	STD	540	1490	685	4410	29.5	17.00/2.0	-
20.5 - 25	TT/TL	20	-	STD	540	1490	685	4410	29.5	17.00/2.0	-
23.5 - 25	TT/TL	16	-	STD	600	1640	749	4855	32.5	19.50/2.5	-
23.5 - 25	TT/TL	20	-	STD	600	1640	749	4855	32.5	19.50/2.5	-
23.5 - 25	TL	24	-	STD	600	1640	749	4855	32.5	19.50/2.5	-
26.5 - 25	TL	28	-	STD	680	1740	796	5150	36.5	22.00/3.0	-
26.5 - 25	TL	32	-	STD	680	1740	796	5150	36.5	22.00/3.0	-
29.5 - 25	TL	28	-	STD	760	1860	849	5544	39.0	25.00/3.5	-
29.5 - 25	TL	32	-	STD	760	1860	849	5544	39.0	25.00/3.5	-

STD: Standard

DB: Dual Bead Version



XL GRIP (L-3)



XL GRIP (E-3/L-3) is a wide-base bias-ply tire for loaders designed to minimize cuts and punctures in heavy-duty loading applications. It provides exceptional traction as well as an extended tire life.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 17.5 - 25	TL	16	-	STD	435	1345	622	3980	30.5	14.00/1.5	-
17.5 - 25	TL	20	-	STD	435	1345	622	3980	30.5	14.00/1.5	-
17.5 - 25	TL	20	-	DB	435	1345	622	3980	30.5	14.00/1.5	-
20.5 - 25	TL	12	-	STD	530	1485	682	4395	32.5	17.00/2.0	-
20.5 - 25	TL	16	-	STD	530	1485	682	4395	32.5	17.00/2.0	-
20.5 - 25	TL	20	-	STD	530	1485	682	4395	32.5	17.00/2.0	-
20.5 - 25	TL	24	-	STD	530	1485	682	4395	32.5	17.00/2.0	-
23.5 - 25	TL	16	-	STD	600	1625	742	4810	35.5	19.50/2.5	-
23.5 - 25	TL	20	-	STD	600	1625	742	4810	35.5	19.50/2.5	-
23.5 - 25	TL	24	-	STD	600	1625	742	4810	35.5	19.50/2.5	-
26.5 - 25	TL	20	-	STD	680	1740	796	5150	36.5	22.00/3.0	-
26.5 - 25	TL	28	-	STD	680	1740	796	5150	36.5	22.00/3.0	-
26.5 - 25	TL	32	-	STD	680	1740	796	5150	36.5	22.00/3.0	-
29.5 - 25	TL	28	-	STD	760	1860	849	5544	39.0	25.00/3.5	-
29.5 - 25	TL	32	-	STD	760	1860	849	5544	39.0	25.00/3.5	-

STD: Standard
DB: Dual Bead Version

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
LI/SS = Load Index / Speed Symbol;
O.W. = Overall Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference

MINING TIRES LOADER / DOZER



EARTHMAX SR 41 (E-4/L-4)



EARTHMAX SR 41 (E-4/L-4) is an All Steel radial tire for articulated dump trucks. It is ideal for operations requiring traction and stability. This tire is also suitable for loader and dozer operations. The deep E-4/L-4 tread ensures long wear and the multi-layer steel belts provide added durability. EARTHMAX SR 41 E-4/L-4 is available with cut-resistant compound whereas EARTHMAX SR 41 (E-4) is available with standard compound.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 26.5 R 25	TL	*	202 A2/193 B	CRC	678	1742	775	5150	59.0	22.00/3.0	22.00/3.0 IF
29.5 R 25	TL	*	208 A2/200 B	CRC	761	1861	830	5510	66.0	25.00/3.5	25.00/3.5 IF

CRC: Cut-resistant compound



XL GRIP PLUS (L-4)



CUT RESISTANT



HEAVY DUTY SERVICE



DURABILITY



HIGH PUNCTURE
RESISTANCE



DEEP TREAD

XL GRIP PLUS (L-4) has been specially designed for loaders. Its deep tread provides high cut and puncture resistance as well as an extended tire life-cycle. XL GRIP PLUS is particularly suitable for heavy-duty service.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 26.5 - 25	TL	28	-	STD	690	1775	815	5253	57.5	22.00/3.0	-
26.5 - 25	TL	32	-	STD	690	1775	815	5253	57.5	22.00/3.0	-
29.5 - 25	TL	28	-	STD	760	1915	876	5709	59.5	25.00/3.5	-
29.5 - 25	TL	32	-	STD	760	1915	876	5709	59.5	25.00/3.5	-

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference



EARTHMAX SR 49 (L-4)



EARTHMAX SR 49 (L-4) is an All Steel radial tire that has been engineered for loaders and dozers. EARTHMAX SR 49 provides optimum performance in severe mining operations requiring exceptional traction.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM		
										Rec./Flange Height	Alt./Flange Height	
33" 35/65 R 33*	TL	**	224 A2	CRC	889	2029	-	-	60.0		28.00/3.5	-

CRC: Cut-resistant compound

* Available soon



EARTHMAX SR 50 (L-5)



EARTHMAX SR 50 (L-5) is an All Steel radial tire specially designed for loaders. The durable casing and sidewall protectors are ideal for the most demanding operations. EARTHMAX SR 50 is made of a special cut-resistant compound which ensures a long wear life. Operators will also appreciate its excellent traction, stability and comfortable ride.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
					Rec./Flange Height	Alt./Flange Height					
											
25" 26.5 R 25	TL	*	202 A2	CRC					89.0	22.00/3.0	22.00/3.0 IF
26.5 R 25	TL	**	209 A2	CRC	690	1772	806	5334	89.0	22.00/3.0	22.00/3.0 IF
29.5 R 25	TL	*	208 A2	CRC	775	1901	862	5722	96.0	25.00/3.5	25.00/3.5 IF

CRC: Cut-resistant compound



EARTHMAX SR 51 (L-5)



The EARTHMAX SR 51 (L-5) is an All Steel radial tire specially designed for loaders or dozers. EARTHMAX SR 51 is ideal for severe operations requiring added cut resistance, sidewall protection and exceptional traction.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
 17.5 R 25	TL	*	176A2	CRC	437	1398	630	4110	61.0	14.00/1.5	14.00LR/1.5; 13.00LR/1.41
20.5 R 25	TL	*	186 A2	CRC	539	1545	703	4650	68.0	17.00/2.0	17.00AL/1.7
23.5 R 25	TL	*	195 A2	CRC	612	1660	743	4882	77.0	19.5/2.5	-

CRC: Cut-resistant compound



EARTHMAX SR 53 (L-5)



EARTHMAX SR 53 (L-5) is an All Steel radial tire specially designed for loaders or dozers operating in severe rocky conditions including in some cases underground operations. The deep L-5 tread provides an extended wear life in addition to excellent self-cleaning.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height 
 17.5 R 25	TL	*	176 A2	CRC	435	1400	637	4214	65.5	14.00/1.5	14.00LR/1.5; 13.00LR/1.41
20.5 R 25	TL	*	186 A2	CRC	535	1550	705	4666	78.0	17.00/2.0	17.00AL/1.7
23.5 R 25	TL	*	195 A2	CRC	604	1666	758	5015	83.5	19.50/2.5	-

CRC: Cut-resistant compound

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference

MINING TIRES LOADER / DOZER



EARTHMAX SR 55 (L-5S)



ALL STEEL CASING



EXTRA
DEEP TREAD



COMFORT



STABILITY

EARTHMAX SR 55 (L-5S) is an All Steel radial tire specially designed for loaders operating in the most severe quarry and mining operations. Thanks to excellent cut protection resulting from the extra-deep and smooth tread design, EARTHMAX SR 55 is able to achieve peak productivity with reduced downtime. Equipment operators will also appreciate its extraordinary stability.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 17.5 R 25	TL	**	182 A2	CRC	453	1399	630	4211	68.0	14.00/1.5	14.00/1.3 DC; 13.00/1.4
26.5 R 25	TL	**	209 A2	CRC	690	1786	810	5375	95.0	22.00/3.0	22.00/3.0 IF
29.5 R 25	TL	**	216 A2	CRC	777	1912	860	5755	104.0	25.00/3.5	25.00/3.5 IF
29.5 R 29	TL	**	218 A2	CRC	775	2009	911	6047	104.0	25.00/3.5	24.00/3.5

CRC: Cut-resistant compound



LOADER SPECIAL (L-5)



LOADER SPECIAL (L-5) is a bias-ply tire that keeps your loaders on the move and provides top efficiency in heavy-duty rock operations. Optimum traction and exceptional cut resistance will boost productivity.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 26.5 - 25	TL	28	-	STD	686	1815	833	5372	93.5	22.00/3.0	-
29.5 - 25	TL	28	-	STD	770	1930	884	5753	99.5	25.00/3.5	-
33" 35/65 - 33	TL	42	-	STD	910	2135	1012	6490	99.5	28.00/3.5	-

STD: Standard



Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference

ARTICULATED DUMP TRUCK



EARTHMAX SR 30 (E-3)



EARTHMAX SR 30 (E-3/L-3) is an All Steel radial tire which is dual-purposed for loaders and articulated dump trucks. The multi-layer steel belts and the rigid block pattern provide excellent traction, stability and durability. The special cut-resistant compound makes EARTHMAX SR 30 the ideal solution for a variety of harsh operating conditions.

SIZE	Type	Star rating	LI/SS	Version	TKPH	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
											Rec./Flange Height	Alt./Flange Height
25" 17.5 R 25	TL	**	176 A2/167 B	CRC	150	446	1347	606	4021	29.0	14.00/1.5	14.00/1.3 (DC)
20.5 R 25	TL	**	186 A2/177 B	CRC	170	529	1487	663	4439	32.0	17.00/2.0	17.00/2.0 IF; 17.00/1.7
23.5 R 25	TL	**	195 A2/185 B	CRC	200	612	1607	711	4797	34.0	19.50/2.5	19.50/2.5 IF
26.5 R 25	TL	**	202 A2/193 B	CRC	230	689	1742	766	5200	38.0	22.00/3.0	22.00/3.0 IF
29.5 R 25	TL	**	208 A2/200 B	CRC	270	765	1861	818	5555	42.0	25.00/3.5	25.00/3.5 IF

CRC: Cut-resistant compound





EARTHMAX SR 41 (E-4)



EARTHMAX SR 41 (E-4/L-4) is an All Steel radial tire for articulated dump trucks. It is ideal for operations requiring traction and stability. This tire is also suitable for loader and dozer operations. The deep E-4/L-4 tread ensures long wear and the multi-layer steel belts provide added durability. EARTHMAX SR 41 (E-4/L-4) is available with cut-resistant compound whereas EARTHMAX SR 41 (E-4/L-4) is available with standard compound.

SIZE	Type	Star rating	LI/SS	Version	TKPH	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
											Rec./Flange Height	Alt./Flange Height
25" 26.5 R 25	TL	**	193 B	STDC	235	678	1742	775	5150	59.0	22.00/3.0	22.00/3.0 IF
26.5 R 25	TL	**	202 A2/193 B	CRC	185	678	1742	775	5150	59.0	22.00/3.0	22.00/3.0 IF
29.5 R 25	TL	**	200 B	STDC	285	761	1861	830	5510	66.0	25.00/3.5	25.00/3.5 IF
29.5 R 25	TL	**	208 A2/200 B	CRC	225	761	1861	830	5510	66.0	25.00/3.5	25.00/3.5 IF

STDC: Standard compound
CRC: Cut-resistant compound

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
LI/SS = Load Index / Speed Symbol;
O.W. = Overall Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference

MINING TIRES

RIGID DUMPER



XL GRIP (E-3)



HEAVY DUTY SERVICE



TRACTION



DURABILITY



CUT RESISTANT


XL GRIP (E-3/L-3) is a bias-ply tire for rigid dump trucks designed to minimize cuts and punctures in severe conditions where exceptional traction is required. These features result in an extended tire life.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	Rec./Flange Height	RIM Alt./Flange Height
25" 16.00 - 25	TL	28	-	STD	465	1485	682	4395	29.5	11.25/2.0	13.00/2.0
16.00 - 25	TL	32	-	STD	465	1485	682	4395	29.5	11.25/2.0	13.00/2.0
18.00 - 25	TT	24	-	STD	510	1615	739	4780	31.5	13.00/2.5	15.00/2.5
18.00 - 25	TT/TL	32	-	STD	510	1615	739	4780	31.5	13.00/2.5	15.00/2.5
18.00 - 25	TT/TL	40	-	STD	510	1615	739	4780	31.5	13.00/2.5	15.00/2.5
33" 18.00 - 33	TT/TL	32	-	STD	510	1820	840	5385	31.5	13.00/2.5	-
18.00 - 33	TL	36	-	STD	510	1820	840	5385	31.5	13.00/2.5	-
18.00 - 33	TL	40	-	STD	510	1820	840	5385	31.5	13.00/2.5	-

STD: Standard



EARTHMAX SR 45 (E-4)

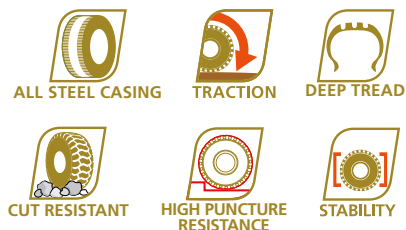


EARTHMAX SR 45 (E-4) is an All Steel radial tire specially designed for rigid haul trucks. EARTHMAX SR 45 is the ideal tire for all operations requiring traction or traveling long distances.

SIZE	Type	Star rating	LI/SS	Version	TKPH	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
											Rec./Flange Height	Alt./Flange Height
33" 18.00 R 33	TL	**	191 B	CRC	177	505	1870	856	5608	55.0	13.00/2.5	-
18.00 R 33	TL	**	191 B	HRC	256	505	1870	856	5608	55.0	13.00/2.5	-
18.00 R 33	TL	**	191 B	STDC	230	505	1870	856	5608	55.0	13.00/2.5	-

STDC: Standard compound
CRC: Cut-resistant compound
HRC: Heat-resistant compound



EARTHMAX SR 45 M (E-4)

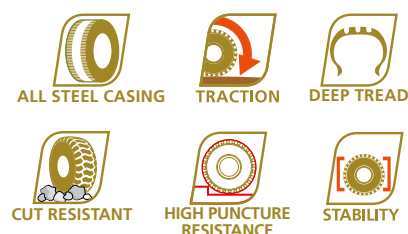

EARTHMAX SR 45 M (E-4) is an All Steel radial tire specially designed for rigid haul trucks. EARTHMAX SR 45 M provides optimum traction and is ideal for operation in long hauls.

SIZE	Type	Star rating	LI/SS	Version	TKPH	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
											Rec./Flange Height	Alt./Flange Height
												
35" 24.00 R 35	TL	**	209 B	CRC	315	664	2180	980	6538	70.0	17.00/3.5	-
24.00 R 35	TL	**	209 B	HRC	435	664	2180	980	6538	70.0	17.00/3.5	-
24.00 R 35	TL	**	209 B	STDC	390	664	2180	980	6538	70.0	17.00/3.5	-

CRC: Cut-resistant compound
HRC: Heat-resistant compound
STDC: Standard compound

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
LI/SS = Load Index / Speed Symbol;
O.W. = Overall Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference



EARTHMAX SR 45 PLUS (E-4)



EARTHMAX SR 45 PLUS (E-4) is an All Steel radial tire specially designed for rigid haul trucks. It is ideal for operations in long hauls. The tread pattern of the EARTHMAX SR 45 PLUS minimizes vibration and noise.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
49" 27.00 R 49*	TL	**	-	CRC	746	2705	-	-	75.0	19.50/4.0	-
27.00 R 49*	TL	**	-	STDC	746	2705	-	-	75.0	19.50/4.0	-
27.00 R 49*	TL	**	-	HRC	746	2705	-	-	75.0	19.50/4.0	-

STDC: Standard compound

CRC: Cut-resistant compound

HRC: Heat-resistant compound

* Available soon



EARTHMAX SR 47 (E-4)



EARTHMAX SR 47 (E-4) is an All Steel radial tire specially designed for rigid haul trucks operating in conditions requiring maximum rock cut and puncture resistance. The E-4 tread depth and the unique tread design ensure long wear even on long hauls, thus reducing downtime and increasing productivity. Available in standard and cut-resistant compounds.

SIZE	Type	Star rating	LI/SS	Version	TKPH	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
											Rec./Flange Height	Alt./Flange Height
33" 18.00 R 33	TL	**	191 B	CRC	130	510	1885	867	5674	64.0	13.0/2.5	-
18.00 R 33	TL	**	191 B	STDC	170	510	1885	867	5674	64.0	13.00/2.5	-
35" 24.00 R 35	TL	**	209 B	CRC	216	670	2181	983	6565	73.0	17.00/3.5	-
24.00 R 35	TL	**	209 B	STDC	290	670	2181	983	6565	73.0	17.00/3.5	-

STDC: Standard compound

CRC: Cut-resistant compound



ROCK GRIP (E-4)



DEEP TREAD



HEAVY DUTY SERVICE



HIGH PUNCTURE
RESISTANCE



HEAT RESISTANCE

ROCK GRIP (E-4) is a bias-ply tire specially designed for trucks in mining service and quarry operations. Whenever your short-haul site conditions require both heat resistance and cut protection, ROCK GRIP is the tire you can rely upon.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 14.00 - 25	TT/TL	24	-	STD	375	1410	649	4173	50.5	10.00/1.5	-
14.00 - 25	TT/TL	24	-	STD	375	1410	649	4173	50.5	10.00/2.0	-
14.00 - 25	TT/TL	28	-	STD	375	1410	649	4173	50.5	10.00/1.5	-
14.00 - 25	TT/TL	28	-	STD	375	1410	649	4173	50.5	10.00/2.0	-
14.00 - 25	TL	32	-	STD	375	1410	649	4173	50.5	10.00/1.5	-
14.00 - 25	TL	32	-	STD	375	1410	649	4173	50.5	10.00/2.0	-
16.00 - 25	TL	28	-	STD	470	1525	699	4514	51.5	11.25/2.0	13.00/2.0
16.00 - 25	TL	32	-	STD	470	1525	699	4514	51.5	11.25/2.0	13.00/2.0
18.00 - 25	TT	24	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5
18.00 - 25	TT/TL	32	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference



ROCK GRIP (E-4)



DEEP TREAD



HEAVY DUTY SERVICE

HIGH PUNCTURE
RESISTANCE

HEAT RESISTANCE

ROCK GRIP (E-4) is a bias-ply tire specially designed for trucks in mining service and quarry operations. Whenever your short-haul site conditions require both heat resistance and cut protection, ROCK GRIP is the tire you can rely upon.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM		
										Rec./Flange Height	Alt./Flange Height	
 25"	18.00 - 25	TL	36	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5
	18.00 - 25	TT/TL	40	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5
 33"	18.00 - 33	TT/TL	36	-	STD	510	1887	869	5586	59.5	13.00/2.5	-
	18.00 - 33	TT/TL	40	-	STD	510	1887	869	5586	59.5	13.00/2.5	-
	18.00 - 33	TL	44	-	STD	510	1887	869	5586	59.5	13.00/2.5	-
 35"	21.00 - 35	TL	36	-	STD	580	2040	943	6068	59.5	15.00/3.0	-
	21.00 - 35	TL	40	-	STD	580	2040	943	6068	59.5	15.00/3.0	-
	24.00 - 35	TL	48	-	STD	655	2190	1003	6482	61.5	17.00/3.5	-
	24.00 - 35	TL	48	-	CRC	655	2190	1003	6482	61.5	17.00/3.5	-

STD: Standard

CRC: Cut-resistant compound



ROCK GRIP (E-4)



DEEP TREAD



HEAVY DUTY SERVICE



HIGH PUNCTURE
RESISTANCE



HEAT RESISTANCE

ROCK GRIP (E-4) is a bias-ply tire specially designed for trucks in mining service and quarry operations. Whenever your short-haul site conditions require both heat resistance and cut protection, ROCK GRIP is the tire you can rely upon.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
49" 24.00 - 49	TL	42	-	STD	655	2531	1184	7498	61.5	17.00/3.5	-
24.00 - 49	TL	48	-	STD	655	2531	1184	7498	61.5	17.00/3.5	-
27.00 - 49	TL	48	-	STD	740	2695	1253	7985	67.5	19.50/4.0	-
27.00 - 49	TL	48	-	CRC	740	2695	1253	7985	67.5	19.50/4.0	-
27.00 - 49	TL	54	-	STD	740	2695	1253	7985	67.5	19.50/4.0	-
51" 30.00 - 51	TL	46	-	STD	830	2910	1350	8615	71.5	22.00/4.5	-
30.00 - 51	TL	52	-	STD	830	2910	1350	8615	71.5	22.00/4.5	-
30.00 - 51	TL	52	-	CRC	830	2910	1350	8615	71.5	22.00/4.5	-

STD: Standard

CRC: Cut-resistant compound

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference



EARTHMAX SR 55 (L-5S)



ALL STEEL CASING

EXTRA
DEEP TREAD

COMFORT



STABILITY

EARTHMAX SR 55 (L-5S) is an All Steel radial tire specially designed for loaders operating in the most severe quarry and mining operations. Thanks to excellent cut protection resulting from the extra-deep and smooth tread design, EARTHMAX SR 55 is able to achieve peak productivity with reduced downtime. Equipment operators will also appreciate its extraordinary stability.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM		
										Rec./Flange Height	Alt./Flange Height	
 24"	12.00 R 24*	TL	**	-	CRC	312	1275	-	-	57.0	8.50/1.3	-
 25"	17.5 R 25	TL	**	182 A2	CRC	453	1399	630	4211	68.0	14.00/1.5	14.00/1.3 DC; 13.00/1.4
	26.5 R 25	TL	**	209 A2	CRC	690	1786	810	5375	95.0	22.00/3.0	22.00/3.0 IF
	29.5 R 25	TL	**	216 A2	CRC	777	1912	860	5755	104.0	25.00/3.5	25.00/3.5 IF
 29"	29.5 R 29	TL	**	218 A2	CRC	775	2009	911	6047	104.0	25.00/3.5	24.00/3.5

CRC: Cut-resistant compound

* Available soon



MINE STAR



MINE STAR is a bias-ply tire which is an excellent choice for heavy-duty underground mining operations. It features high cut/chip and puncture resistance providing improved operational efficiency. MINE STAR is made of a special compound and features a special tread design resulting in an extended tire life-cycle.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
15" 8.25 - 15	TT	20	-	STD	244	848	-	-	19.0	6.5	6.0; 7.0
35 X 15 - 15	TT	32	-	STD	372	885	-	-	23.5	11.0	11.50; 11.00 BD

STD: Standard



Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference

UNDERGROUND VEHICLE



SM 53 (L-3S)



STABILITY



CUT RESISTANT

SM 53 (L-3S) has been specially designed for loaders in underground mining and loading applications. It features high stability as well as a smooth tread design providing excellent cut resistance.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
 9.00 - 20	TT	16	-	STD	266	1040	472	3080	23.0	7.0	-

STD: Standard



SM 55 (L-5S)

EXTRA
DEEP TREAD

HEAVY DUTY SERVICE



STABILITY



DURABILITY

CUT & CHIP
RESISTANCE

SM 55 (L-5S) is a bias-ply tire ideal for underground mining operations. The specially designed cut-and-chip-resistant tread compound minimizes punctures thereby reducing machine downtime. The extra-deep L-5S tread depth guarantees an extended tire life. The tire is also available in a steel-belted version.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
 7.00 - 12	TT	14	-	STD	205	710	323	2159	-	5.00 S	-
7.00 - 12	TT	16	-	STD	205	710	323	2159	-	5.00 S	-
 12.00 - 24	TT	20	-	STD	310	1275	594	3777	60.0	8.5	7.33 V; 8; 8.00 V; 8.50 V
12.00 - 24	TT	24	-	STD	310	1275	594	3777	60.0	8.5	7.33 V; 8; 8.00 V; 8.50 V
12.00 - 24	TT	24	-	SB	310	1275	594	3777	60.0	8.5	7.33 V; 8; 8.00 V; 8.50 V
 17.5 - 25	TL	20	-	STD	438	1365	631	4043	64.5	14.00/1.5	14.00/1.3; 14.00/1.4 (DC)
17.5 - 25	TL	20	-	SB	438	1365	631	4043	64.5	14.00/1.5	14.00/1.3; 14.00/1.4 (DC)

STD: Standard

SB: Steel Belted Version



SM 55 (L-5S)



SM 55 (L-5S) is a bias-ply tire ideal for underground mining operations. The specially designed cut-and-chip-resistant tread compound minimizes punctures thereby reducing machine downtime. The extra-deep L-5S tread depth guarantees an extended tire life. The tire is also available in a steel-belted version.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	Rec./Flange Height	RIM Alt./Flange Height	
												
25"	17.5 - 25	TL	24	-	STD	438	1365	631	4043	64.5	14.00/1.5	14.00/1.3; 14.00/1.4 (DC)
	17.5 - 25	TL	24	-	SB	438	1365	631	4043	64.5	14.00/1.5	14.00/1.3; 14.00/1.4 (DC)
	18.00 - 25	TL	28	-	STD	528	1650	750	4880	83.2	13.00/2.5	15.00/2.5
	18.00 - 25	TL	28	-	SB	528	1650	750	4880	83.2	13.00/2.5	15.00/2.5
	18.00 - 25	TL	40	-	STD	528	1650	750	4880	83.2	13.00/2.5	15.00/2.5
	18.00 - 25	TL	40	-	SB	528	1650	750	4880	83.2	13.00/2.5	15.00/2.5
	26.5 - 25	TL	28	-	SB	700	1798	816	5322	96.5	22.00/3.0	-
	26.5 - 25	TL	32	-	SB	700	1798	816	5322	96.5	22.00/3.0	-
29"	29.5 - 29	TL	28	-	SB	755	2020	882	6021	104.0	25.00/3.5	24.00/3.5

STD: Standard

SB: Steel Belted Version

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference

UNDERGROUND VEHICLE



POWER TRAX HD



POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.

SIZE	Type	PR	LI/SS	Ver- sion	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
20" 12.00 - 20	TT	20	-	STD	320	1150	-	-	34.5	8.50	9.0
12.00 - 20	TT	20	-	SPL	320	1150	-	-	35.0	8.50	9.0
12.00 - 20	TT	28	-	STD	320	1150	-	-	34.5	8.50	9.0

STD: Standard

SPL: Special Version



POWER TRAX HD SMOOTH



POWER TRAX HD SMOOTH is a bias-ply tire specially designed for port and underground mining operations. The special sidewall protection along with a solid tread prevents cut and puncture damages that are common in such demanding environments. When you need to move heavy-duty loads, Power Trax HD Smooth is your ideal partner.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
20" 12.00 - 20	TT	20	-	STD	320	1150	-	-	-	8.50	9.0

STD: Standard



ROCK GRIP (E-4)



DEEP TREAD



HEAVY DUTY SERVICE



HIGH PUNCTURE
RESISTANCE



HEAT RESISTANCE

ROCK GRIP (E-4) best suits on/off trucks in quarries and short-haul mining applications to carry heavy loads. The special tread compound minimizes cuts and punctures on roughest ground conditions. ROCK GRIP (E-4) offers exceptional traction and an extended tire life-cycle.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
25" 16.00 - 25	TL	28	-	STD	470	1525	699	4514	51.5	11.25/2.0	13.00/2.0
16.00 - 25	TL	32	-	STD	470	1525	699	4514	51.5	11.25/2.0	13.00/2.0
18.00 - 25	TT	24	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5
18.00 - 25	TT/TL	32	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5
18.00 - 25	TL	36	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5
18.00 - 25	TT/TL	40	-	STD	510	1650	753	4885	54.5	13.00/2.5	15.00/2.5

STD: Standard



Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 O.W. = Overall Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference



SUPER GRADER (G-2)



DURABILITY



TRACTION



SELF-CLEANING



HEAVY DUTY SERVICE



SPECIAL
COMPOUND

SUPER GRADER (G-2) is a bias tire particularly designed for graders. It shows excellent traction and self-cleaning features. SUPER GRADER is made of a special compound which enables an extended tire life-cycle and heavy-duty service.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
24" 13.00 - 24	TL	12	-	STD	340	1280	613	3925	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
13.00 - 24	TL	16	-	STD	340	1280	613	3925	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
14.00 - 24	TL	12	-	STD	364	1335	598	3952	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00 VA SDC; 10.00 WA SDC
14.00 - 24	TL	16	-	STD	364	1335	598	3952	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
16.00 - 24	TL	16	-	STD	430	1450	644	4307	29.5	10.00 VA SDC	-

STD: Standard



TRAC GRADER + (G-2)



DURABILITY



TRACTION



SELF-CLEANING


TRAC GRADER + (G-2) is a bias-ply tire for graders. It is an excellent choice for the budget-minded customers. The durable casing is designed to last. The self-cleaning tread design shows open lug-to-void-ratio which provides best traction in all conditions. Its "special" version is made of a special cut-and-chip-resistant compound.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
24" 13.00 - 24	TL	12	-	STD	340	1280	600	3943	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
13.00 - 24	TL	12	-	SPL	340	1280	600	3943	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
13.00 - 24	TL	14	-	STD	340	1280	600	3943	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
13.00 - 24	TL	16	-	STD	340	1280	600	3943	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
14.00 - 24	TL	12	-	STD	364	1348	598	3990	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00 VA SDC; 10.00 WA SDC
14.00 - 24	TL	12	-	SPL	364	1348	598	3990	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00 VA SDC; 10.00 WA SDC
14.00 - 24	TL	16	-	STD	364	1348	598	3990	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
14.00 - 24	TL	16	-	SPL	364	1348	598	3990	25.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC

STD: Standard



EARTHMAX SR 25 (G-2)

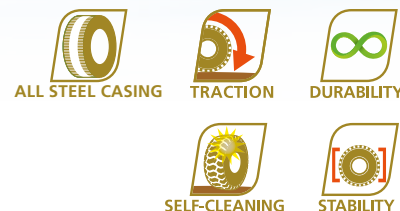

EARTHMAX SR 25 (G-2/L-2) is an All Steel radial tire, which has been specially designed for motor graders and loaders operating in the most severe road construction or mining applications. Its non-directional tread design offers excellent self-cleaning properties in addition to traction and stability off the road.

SIZE	Type	Star rating	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM		
										Rec./Flange Height	Alt./Flange Height	
 14.00 R 24*	TL	*	153A8	STD	365	1360	-	-	27.5		8.00TG	9.00GR

STD: Standard

* Available soon



XL GRIP (G-3)



XL GRIP (G-3) is a bias-ply tire for graders designed to minimize cuts and punctures in heavy-duty grading environments where exceptional traction is required.

SIZE	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Tread depth (mm)	RIM	
										Rec./Flange Height	Alt./Flange Height
24" 13.00 - 24	TL	16	-	STD	350	1295	596	3833	30.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
14.00 - 24	TL	16	-	STD	365	1355	622	4040	30.0	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC
16.00-24	TL	16	-	STD	432	1450	654	4289	32.5	10.00 VA SDC	-

STD: Standard



Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
LI/SS = Load Index / Speed Symbol;
O.W. = Overall Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference



Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
 Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica, 133
 20831 Seregno (MB), Italy
 Tel: (+39) 0362 33 03 28
 (+39) 0362 32 51 07
 Fax: (+39) 0362 23 24 72

BKT USA Inc. (AG Division)

2660 West Market St. Suite 100
 Fairlawn (Akron) OH 44333, USA
 Tel: (+1) 330 836 1090
 Fax: (+1) 330 836 1091
 Toll Free: (+1) 888 660 0662

BKT Tires, Inc. (OTR Division)

12 Cadillac Drive, Suite 240
 Brentwood, Tennessee 37027, USA
 Toll Free: (+1) 844 258 8473
 Fax: (+1) 888 290 1804

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
 Toronto, Ontario M5J 1R7, Canada
 Tel: AG/IND (+1) 905 641 5636
 OTR (+1) 780 888 5667
 Fax: (+1) 416 229 1711