



**MULTIUSE  
TIRES**

# MULTIUSE TIRES



## MULTIMAX MP 513




MULTIMAX MP 513 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 513 allows to carry heavy loads at high speeds. Its reinforced bead ensures a longer service life and extra mileage to enhance productivity.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
17" 425/55 R 17	134 G	13	13.00	421	900	399	2645	-	STD
20" 405/70 R 20	136 G	13	13 SDC; 12 SDC	407	1076	493	3253	-	STD
425/75 R 20	148 G	13	13 SDC; 11 SDC; 12 SDC; 11; 12	421	1146	521	3479	-	STD
24" 495/70 R 24	155 G	W 16 L	DW 15 L; DW 16 L; W 15 L	499	1304	588	3974	-	STD

STD: Standard



## MULTIMAX MP 522

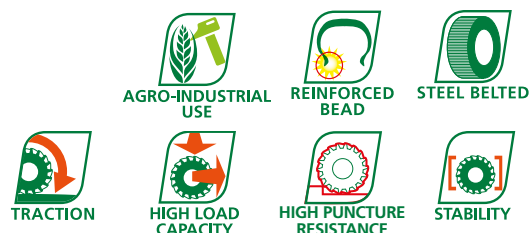

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
18" 280/80 R 18	132 A8/B	9; 9 SDC	-	282	907	421	2727	350	STD
20" 380/75 R 20 (14.5 R 20)	148 A8/B	W 12	W 11; 11; 12	384	1074	483	3251	500	STD
400/70 R 20 (16.0/70 R 20)	149 A8/B	13	12 SDC; 13 SDC; 14	404	1068	476	3199	525	STD
24" 460/70 R 24 (17.5L R 24)	159 A8/B	DW 15 L	DW 14 L; DW 16 L	465	1250	568	3766	600	STD
500/70 R 24 (19.5L R 24)	164 A8/B	DW 16 L	DW 15 L; DW 18 L	503	1310	595	3890	625	STD

STD: Standard





## MULTIMAX MP 540



AGRO-INDUSTRIAL  
USE



ALL STEEL CASING



DURABILITY



HIGH LOAD  
CAPACITY



HIGH SPEED



STABILITY

MULTIMAX MP 540 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 540 allows to carry heavy loads at high speeds.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
20" 335/80 R 20	149 K	11	-	325	1040	480	3130	-	STD

STD: Standard



Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index

# MULTIUSE TIRES



## RT 747 AGRO INDUSTRIAL



RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for backhoe loaders, compact loaders and telehandlers. Its extra wide lugs provide excellent grip and great stability in lift operations. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
<b>24"</b> 460/70 R 24 (17.5L R 24)	152 A8/149 B	152 A8/149 B	DW 14 L; DW 16 L	465	1254	556	3840	575	STD
500/70 R 24 (19.5L R 24)	157 A8/154 B	157 A8/154 B	DW 15 L; DW 18 L	485	1320	585	3949	625	STD

STD: Standard



## AT 603



AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>18"</b> 10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	STD	10	TL	138 A6/131 A8
10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	HD	10	TL	138 A6/131 A8
10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	SPL	10	TL	138 A6/131 A8
12.5/80 - 18	W 9	11	308	987	438	2892	STD	12	TL	148 A6/142 A8
12.5/80 - 18	W 9	11	308	987	438	2892	SPL	12	TL	148 A6/142 A8
12.5/80 - 18	W 9	11	308	987	438	2892	STD	16	TL	154 A6/150 A8
12.5/80 - 18	W 9	11	308	987	438	2892	STD	18	TL	156 A6/150 A8

HD: Heavy Duty Version ①

SPL: Special Version ②

STD: Standard







## AT 621



AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features a regular tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>15"</b> 33 X 12.5 - 15	10.00 F SDC	-	318	851	385	2493	STD	8	TT	-
<b>16"</b> 12.5/70 - 16	10 LB	-	315	855	385	2584	STD	8	TL	-
<b>18"</b> 12.5/80 - 18	W 9	11.0	308	987	465	2928	STD	12	TT	148 A6/142 A8
12.5/80 - 18	W 9	11.0	308	987	465	2928	STD	12	TL	148 A6/142 A8
12.5/80 - 18	W 9	11	308	987	465	2928	SPL	12	TL	148 A6/142 A8
12.5/80 - 18	W 9	11.0	308	987	465	2928	STD	16	TT	154 A6/150 A8
12.5/80 - 18	W 9	11.0	308	987	465	2928	IND HD	16	TL	154 A6/150 A8
15.5/60 - 18	W 13	-	400	950	428	2871	STD	10	TL	-
15.5/70 - 18 (400/70 - 18)	W 13	-	400	1030	474	3111	STD	10	TL	-
<b>20"</b> 17.5/65 - 20	W 14 L	-	450	1090	490	3294	STD	10	TL	-
42 X 17 - 20	14.00 TG SDC	-	432	1073	480	3198	STD	10	TT	-
<b>24"</b> 16.9 - 24	DW 15 L	DW 14 L	450	1302	582	3776	IND	12	TL	149 A8
17.5L - 24	DW 15 L	DW 14 L	450	1255	563	3640	STD	8	TL	139 A8
19.5L - 24	DW 16 L	-	482	1305	587	3936	STD	12	TL	151 A8
<b>26"</b> 18.4 - 26	DW 16 L	DW 15 L	480	1425	636	4133	STD	12	TL	156 A8
<b>28"</b> 16.9 - 28	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TT	152 A8
16.9 - 28	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TL	152 A8
<b>30"</b> 16.9 - 30	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TL	153 A8

STD: Standard

SPL: Special Version ①

IND HD: Industrial Heavy Duty Version ②

IND: Industrial

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index

# MULTIUSE TIRES



## MP 567



MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>15.3"</b> 10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	10	TL	-
10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	12	TL	-
10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	14	TL	-
10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	18	TL	-
11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	10	TL	-
11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	14	TL	-
11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	18	TL	-
<b>18"</b> 10.5 - 18	9	9 SDC	270	905	415	2700	STD	10	TT	-
10.5 - 18	9	9 SDC	270	905	415	2700	STD	10	TL	-
10.5 - 18	9	9 SDC	270	905	415	2700	STD	12	TL	-
12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TT	-
12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TL	-
12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TT	-
12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TL	-
12.5 - 18	11	12 SDC	325	990	450	2940	STD	16	TL	-

STD: Standard





## MP 567



MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>19.5"</b>										
<b>18 - 19.5</b>	14.00	-	460	1104	498	3280	STD	14	TL	-
<b>18 - 19.5</b>	14.00	-	460	1104	498	3280	STD	16	TL	-
<b>18 - 19.5</b>	14.00	-	460	1104	498	3280	STD	18	TL	-
<b>20"</b>										
<b>10.5 - 20</b>	9	9 SDC	270	955	445	2880	STD	10	TT	-
<b>10.5 - 20</b>	9	9 SDC	270	955	445	2880	STD	10	TL	-
<b>12.5 - 20</b>	11.0	12 SDC	325	1040	475	3090	STD	10	TT	-
<b>12.5 - 20</b>	11.0	12 SDC	325	1040	475	3090	STD	10	TL	-
<b>12.5 - 20</b>	11.0	12 SDC	325	1040	475	3090	STD	12	TT	-
<b>12.5 - 20</b>	11.0	12 SDC	325	1040	475	3090	STD	12	TL	-
<b>14.5 - 20</b>	11	12 SDC	360	1116	495	3315	STD	10	TL	-
<b>14.5 - 20</b>	11	12 SDC	360	1116	495	3315	STD	12	TL	-
<b>14.5 - 20</b>	11	12 SDC	360	1116	495	3315	STD	14	TL	-
<b>14.5 - 20</b>	11	12 SDC	360	1116	495	3315	STD	16	TL	-
<b>14.5 - 20</b>	11	12 SDC	360	1116	495	3315	STD	18	TL	-
<b>16.0/70 - 20 (405/70 - 20)</b>	13 SDC	12	405	1128	490	3350	STD	14	TL	-
<b>16.0/70 - 20 (405/70 - 20)</b>	13 SDC	12	405	1128	490	3350	STD	14	TT	-

STD: Standard



Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index



# MULTIUSE TIRES



## MP 570



MP 570 is a road-oriented and agro-industrial tire, which is suitable for excavators and compact loaders. This tire provides good traction as well as excellent self-cleaning properties in all operating conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>18"</b> 12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-
12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-
<b>20"</b> 12.5 - 20	11	12 SDC	335	1050	480	3130	STD	10	TL	-
12.5 - 20	11	12 SDC	325	1040	475	3090	STD	12	TL	-
14.5 - 20	11	12 SDC	360	1116	505	3325	STD	12	TL	-

STD: Standard



## MP 585



MP 585 is a road-oriented and agro-industrial tire, which is suitable for multi-purpose vehicles in municipality/maintenance applications. This tire is specially engineered with a tread pattern that offers maximum stability in the most difficult working conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>20"</b> 10.5 - 20	9	9 SDC	273	970	455	2890	STD	10	TL	-
12.5 - 20	11	12 SDC	335	1050	480	3130	STD	12	TL	-

STD: Standard



## MP 590



MP 590 is an agro-industrial tire suitable for loading operations with compact loaders, telehandlers and forklifts. This tire provides good traction and excellent stability as well as high load capacity to enhance productivity.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>22.5"</b> 18 - 22.5 (445/65 - 22.5)	14.0	-	465	1190	530	3534	STD	16	TL	-
18 - 22.5 (445/65 - 22.5)	14.0	-	465	1190	530	3534	STD	20	TL	-

STD: Standard



## MP 600



MP 600 is a road-oriented and agro-industrial tire, suitable for loading operations with compact loaders and telehandlers. This tire provides good traction and excellent stability along with an extended product life-cycle.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>18"</b> 10.5 - 18	9	9 SDC	272	920	420	2740	STD	10	TL	-
12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-
12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-
<b>24"</b> 405/70 - 24 (16.0/70 - 24)	13 SDC	12	405	1185	545	3530	STD	10	TL	-
405/70 - 24 (16.0/70 - 24)	13 SDC	12	405	1185	545	3530	STD	14	TL	-

STD: Standard


Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index



# MULTIUSE TIRES



## AS 504

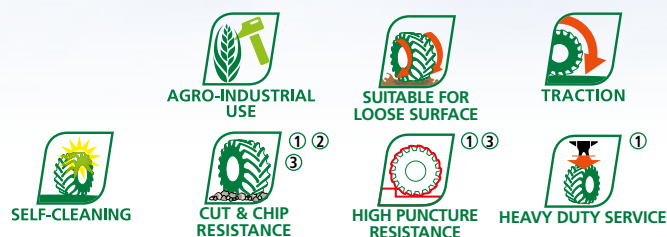

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>12"</b> 6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TT	90 A6/87 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TL	90 A6/87 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TT	99 A6/96 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TL	99 A6/96 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	HD	6	TT	99 A6/96 A8
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TT	94 A6/88 A8
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TL	94 A6/88 A8
7.00 - 12	4.5	-	187	683	300	2001	STD	6	TL	101 A6/95 A8
7.00 - 12	4.5	-	187	683	300	2001	SPL	8	TL	107 A6/ 100 A8
11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TT	120 A6/ 116 A8
11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TL	120 A6/ 116 A8

STD: Standard


HD: Heavy Duty Version<sup>①</sup>

SPL: Special version<sup>③</sup>





## AS 504

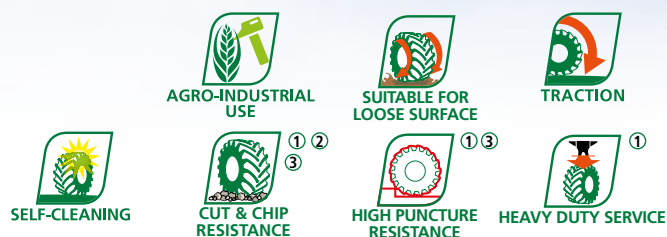

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>15"</b> 5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	4	TT	86 A6/82 A8
5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TT	94 A6/90 A8
7.5L - 15	6 LB	5 K; 5 J; 5 K	210	765	354	2280	STD	6	TT	116 A6/112 A8
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TT	119 A6/115 A8
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TL	119 A6/115 A8
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	HD	8	TT	119 A6/115 A8

STD: Standard


HD: Heavy Duty Version ①

Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index

# MULTIUSE TIRES



## AS 504

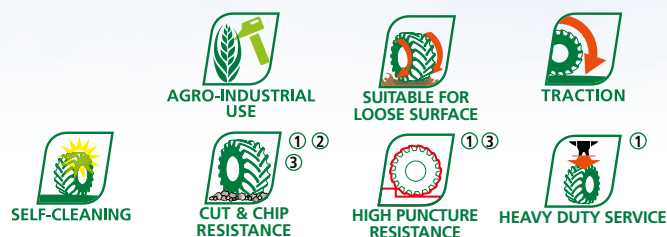

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.


SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
15.3" 10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TT	124 A6/119 A8
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TL	124 A6/119 A8
10.0/75 - 15.3	9.00	-	264	780	345	2285	IND	8	TL	124 A6/119 A8
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	10	TL	128 A6/123 A8
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	14	TL	136 A6/130 A8
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TT	142 A6/138 A8
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TL	142 A6/138 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TT	133 A6/126 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TL	133 A6/126 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	10	TL	137 A6/131 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	141 A6/135 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TL	141 A6/135 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TT	145 A6/139 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TL	145 A6/139 A8
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	114 A6/110 A8
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TL	114 A6/110 A8

STD: Standard  
IND: Industrial ②





## AS 504

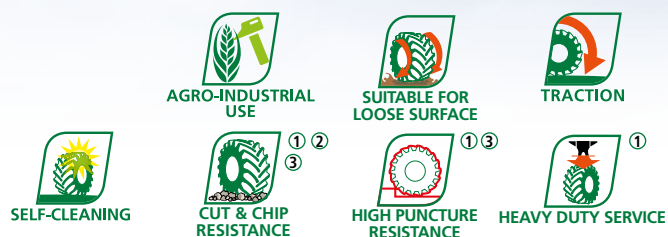

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>16"</b>										
<b>6.00 - 16</b>	4.00 E	4.50 E; 4½ K	164	735	343	2190	STD	6	TT	101 A6/98 A8
<b>7.50 - 16</b>	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	6	TT	111 A6/ 107 A8
<b>7.50 - 16</b>	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TT	119 A6/115 A8
<b>7.50 - 16</b>	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TL	119 A6/115 A8
<b>17"</b>										
<b>15.0/55 - 17</b>	13.00	13	380	890	395	2608	STD	10	TL	141 A6/134 A8
<b>15.0/55 - 17</b>	13.00	13	380	890	395	2608	STD	14	TL	147 A6/141 A8
<b>19.0/45 - 17</b>	16.00	-	465	865	389	2578	STD	14	TL	150 A6/146 A8
<b>420/55 - 17</b>	13.00	-	430	910	407	2712	STD	14	TL	-
<b>420/55 - 17</b>	13.00	-	430	910	407	2712	STD	16	TL	-
<b>18"</b>										
<b>7.50 - 18</b>	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	6	TT	113 A6/109 A8
<b>7.50 - 18</b>	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	8	TT	120 A6/ 117 A8
<b>10.5/80 - 18</b>	W 9	9; W 8	274	907	405	2657	STD	10	TL	138 A6/131 A8
<b>12.5/80 - 18</b>	W 9	9; 11	308	987	438	2892	STD	12	TL	148 A6/142 A8
<b>12.5/80 - 18</b>	W 9	9; 11	308	987	438	2892	STD	16	TL	154 A6/150 A8
<b>12.5/80 - 18</b>	W 9	9; 11	308	987	438	2892	STD	18	TL	156 A6/150 A8

STD: Standard


Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index



# MULTIUSE TIRES



## AS 504

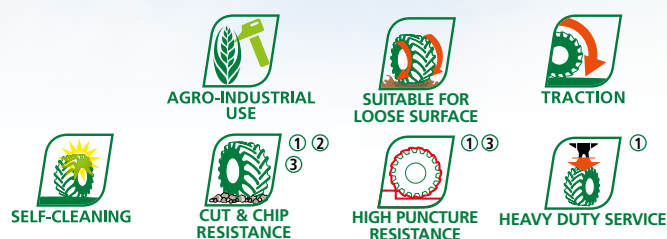


AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
<b>20"</b> 7.50 - 20	5.50 F	4.50 E; 6.00 F; 5.00 F	209	904	422	2695	STD	8	TT	122 A6/119 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	10	TL	153 A6/147 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	12	TL	157 A6/151 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	14	TL	160 A6/156 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	16	TL	162 A6/156 A8
400/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	IND	-	TL	149 A8
<b>24"</b> 15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	10	TL	160 A6/154 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	12	TL	163 A6/157 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	14	TL	166 A6/160 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	166 A6/160 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	16	TL	169 A6/163 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	10	TL	165 A6/161 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	12	TL	169 A6/165 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TT	174 A6/170 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TL	174 A6/170 A8
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	156 A8
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	162 A8

STD: Standard  
IND: Industrial ②  
SPL: Special Version ③



## TR 461

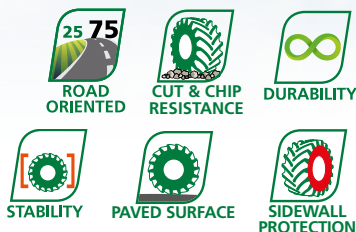

TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
18"	W 9	11	305	987	435	2902	STD	12	TL	138 A8
24"	DW 15 L	DW 14 L	440	1280	566	3763	STD	14	TL	151 A8
	DW 16 L	-	490	1310	578	3851	STD	12	TL	151 A8
	DW 16 L	-	490	1310	578	3851	STD	14	TL	154 A8
	DW 18 L	-	540	1385	607	4072	STD	14	TL	157 A8
28"	DW 15 L	DW 14 L	440	1390	620	4087	STD	14	TL	154 A8

STD: Standard

Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index



# MULTIUSE TIRES



## TR 882



TRACTION



HIGH LOAD  
CAPACITY AT  
STANDARD PRESSURE



AGRO-INDUSTRIAL  
USE



CUT & CHIP  
RESISTANCE



HEAVY DUTY SERVICE



HIGH PUNCTURE  
RESISTANCE

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	138 A6/132 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	18	TL	155 A6/149 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	155 A6/149 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	155 A6/149 A8

STD: Standard

AB: Aramid Belted Version ①

HD: Heavy Duty Version ②

SPL: Special Version ③












## GRIP STAR



GRIP STAR is an agro-industrial tire for loading applications with telehandlers. It shows excellent traction and self-cleaning properties. Besides, it is an all-season tire particularly suitable for operations on muddy ground. GRIP STAR is also available in a "special" version that features extra cut and chip resistance.

SIZE	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
									Rec./Flange Height	Alt./Flange Height
 15.5/80 - 24	TL	16	-	STD	392	1270	569	3683	W 12	W 13; W 14 L
15.5/80 - 24	TL	16	-	SPL	392	1270	569	3683	W 12	W 13; W 14 L





STD: Standard  
SPL: Special Version



## EM 936



EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		
									Rec./Flange Height	Alt./Flange Height	
20"	8.25 - 20	TT	14	133 B	STD	235	980	467	2970	6.5	6.0; 7.0
	9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5; 7.5
	9.00 - 20	TT	14	140 B	SPL	256	1012	481	3070	7.0	6.5; 7.5
	10.00 - 20	TT	16	146 B	STD	275	1050	498	3180	7.5	7.0; 8.0
	11.00 - 20	TT	16	149 B	STD	295	1090	508	3302	8.0	7.5; 8.5
	16.0/70 - 20	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13
	16.0/70 - 20	TT	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13
24"	16.0/70 - 24 (405/70 - 24)	TL	14	152 B/169 A2	STD	410	1190	575	3600	13 SDC	13 (DC)
	20 - 24 (22/70 - 24)	TL	12	158 B/173 A2	STD	535	1390	665	4205	16.00 T SDC	-

STD: Standard  
SPL: Special Version

Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# MULTIUSE TIRES



## SNOW TRAC



ICE & SNOW



HEAVY DUTY SERVICE



DURABILITY







STABILITY



CUT & CHIP RESISTANCE

SNOW TRAC is particularly suitable for road applications in winter conditions with skid steers. It features excellent traction and is ideal for ice and snow operations. Its reinforced structure eliminates slippage risks.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		
									Rec./Flange Height	Alt./Flange Height	
16.5"	10 - 16.5	TL	6	-	STD	270	780	357	2340	8.25	-
	10 - 16.5	TL	10	-	STD	270	780	357	2340	8.25	-
	12 - 16.5	TL	6	-	STD	305	835	379	2505	9.75	-
	12 - 16.5	TL	10	-	STD	305	835	379	2505	9.75	-
25"	15.5 - 25*	-	-	-	-	-	-	-	-	-	-
	17.5 - 25	TL	12	-	STD	445	1348	608	4044	14.00/1.5	-
	20.5 - 25	TL	16	-	STD	537	1492	652	4423	17.00/2.0	17.00/1.7
	23.5 - 25	TL	16	-	STD	612	1630	-	-	19.50/2.5	-

STD: Standard

\*: Available soon





## GIANT TRAX



HEAVY DUTY SERVICE



DURABILITY



EXTRA  
DEEP TREAD







CUT & CHIP  
RESISTANCE



HIGH PUNCTURE  
RESISTANCE

GIANT TRAX has been designed for skid steer loaders in scrap yard operations, on rough concrete surfaces, recycling applications and mines. The extra deep tread with wider and sturdier blocks provides best traction, stability, and puncture resistance. The special tread compound results in exceptional cut and chip resistance along with excellent wear resistance on all types of terrains.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
									Rec./Flange Height	Alt./Flange Height
16.5" 10 - 16.5	TL	12	-	STD	270	775	362	2317	8.25	-
12 - 16.5	TL	14	-	STD	315	840	398	2521	9.75	-

STD: Standard



Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index

# MULTIUSE TIRES



## SKID POWER



SKID POWER has been designed for skid steers in construction applications. It shows excellent traction as well as enhanced self-cleaning features. The tire features an extra deep tread along with extra sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER is the ideal tire for loose surfaces.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
									Rec./Flange Height	Alt./Flange Height
14" 25 X 8.5 - 14	TL	6	-	STD	213	652	-	-	7 JA	-
16.5" 10 - 16.5	TL	8	-	STD	254	775	355	2286	8.25	-
10 - 16.5	TL	10	-	STD	254	775	355	2286	8.25	-
12 - 16.5	TL	10	-	STD	305	821	373	2422	9.75	-
17.5" 14 - 17.5	TL	14	-	STD	355	940	424	2773	10.5	-

STD: Standard











## SKID POWER SK



SKID POWER SK has been specially designed for skid steers in construction applications. Its sidewall and rim guard protectors as well as its deep tread provide an extended tire life-cycle.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
									Rec./Flange Height	Alt./Flange Height
<b>16.5"</b> 10 - 16.5	TL	8	-	STD	270	775	355	2286	8.25	-
10 - 16.5	TL	10	-	STD	270	775	355	2286	8.25	-
12 - 16.5	TL	10	-	STD	312	825	375	2434	9.75	-
12 - 16.5	TL	12	-	STD	312	825	375	2434	9.75	-





STD: Standard



## SKID POWER (CHEVRON)



SKID POWER (CHEVRON) has been specially designed for skid steers in construction applications. It features excellent traction as well as enhanced self-cleaning properties. SKID POWER (CHEVRON) is particularly suitable for loose surfaces and shows high cut and chip resistance.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
									Rec./Flange Height	Alt./Flange Height
<b>15"</b> 7.00 - 15	TL	6	-	STD	203	762	347	2295	5.50 F	6 LB

STD: Standard

Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index





# MULTIUSE TIRES



## SKID POWER HD



SKID POWER HD has been designed for skid steers in construction applications. The tire features an extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER HD is the ideal tire for loose surfaces and heavy-duty service.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Rec./Flange Height	RIM	Alt./Flange Height
											
8"	18 X 8.5 - 8	TL	8	-	STD	210	460	207	1357	7.00 I - 55; I - 70; I - 90	-
10"	18 X 8.5 - 10	TL	8	-	STD	205	465	213	1372	7.00 I - 55; I - 70; I - 90	-
12"	23 X 8.50 - 12	TL	6	-	STD	215	585	267	1726	7.00 I - 55	7.00 I - 70; 7 JA
	23 X 8.50 - 12	TL	8	-	STD	215	585	267	1726	7.00 I - 55	7.00 I - 70; 7 JA
	23 X 8.50 - 12	TL	12	-	STD	215	585	267	1726	7.00 I - 55	7.00 I - 70; 7 JA
	26 X 12 - 12	TL	8	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA
	26 X 12 - 12	TL	10	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA
	26 X 12 - 12	TL	12	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA
	27 X 10 - 12 (250/75 - 12)	TT	14	-	IND	255	700	-	-	8.00 G	-
15"	27 X 10.5 - 15	TL	8	-	STD	266	684	316	2020	8 LB	-
	27 X 8.50 - 15	TL	8	-	STD	218	676	313	1995	7 JA	-
	31 X 15.5 - 15	TL	8	-	STD	400	790	360	2330	13 LB	-
	31 X 15.5 - 15	TL	10	-	STD	400	790	360	2330	13 LB	-
16.5"	10 - 16.5	TL	8	-	STD	267	775	355	2286	8.25	-
	10 - 16.5	TL	10	-	STD	267	775	355	2286	8.25	-
	12 - 16.5	TL	10	-	STD	324	850	385	2508	9.75	-
	12 - 16.5	TL	12	-	STD	324	850	385	2508	9.75	-
	31.5 X 13 - 16.5	TL	10	-	STD	330	795	363	2345	9.75	-
	33 X 15.5 - 16.5	TL	12	-	STD	394	838	380	2472	13.00	-
17.5"	14 - 17.5	TL	14	-	STD	350	930	420	2744	10.50	-
19.5"	15 - 19.5	TL	14	-	STD	400	1035	468	3053	11.75	12.25

STD: Standard  
IND: Industrial









## JUMBO TRAX HD



JUMBO TRAX HD is a block pattern tire for skid steers. It features cut and chip resistance and is particularly suitable for heavy-duty service. The deep tread along with excellent sidewall protection provides an extended tire life-cycle. JUMBO TRAX HD is also available in a "special" version.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		
									Rec./Flange Height	Alt./Flange Height	
16.5"	10 - 16.5	TL	10	-	STD	268	795	363	2345	8.25	-
	10 - 16.5	TL	10	-	SPL	268	795	363	2345	8.25	-
	12 - 16.5	TL	10	-	STD	325	855	387	2522	9.75	-
	12 - 16.5	TL	12	-	STD	325	855	387	2522	9.75	-

STD: Standard  
SPL: Special version



Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index





# MULTIUSE TIRES



## POWER TRAX HD



POWER TRAX HD is a premium bias-ply tire that is specially designed for forklifts and skid steers in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		
									Rec./Flange Height	Alt./Flange Height	
8"	5.00 - 8	TT	10	-	STD	145	480	-	-	3.00 D	3.25 I
	18 X 7 - 8 (180/70 - 8)	TT	16	-	STD	173	470	-	-	4.33 R	5.00 F
9"	6.00 - 9	TT	-	-	STD	166	543	-	-	4.00 E	-
10"	6.50 - 10	TT	10	-	STD	193	595	-	-	5.00 F	5.50 F
	6.50 - 10	TT	12	-	STD	193	595	-	-	5.00 F	5.50 F
	6.50 - 10	TT	14	-	STD	193	595	-	-	5.00 F	5.50 F
	23 X 9 - 10 (225/75 - 10)	TT	18	-	STD	235	590	-	-	6.50 F	-
	23 X 9 - 10 (225/75 - 10)	TT	20	-	STD	235	590	-	-	6.50 F	-
12"	7.00 - 12	TT	14	-	STD	205	675	-	-	5.00 S	-
	7.00 - 12	TT	16	-	STD	205	675	-	-	5.00 S	-
	27 X 10 - 12 (250/75 - 12)	TT	16	-	STD	255	690	-	-	8.00 G	-
	27 X 10 - 12 (250/75 - 12)	TT	20	-	STD	255	690	-	-	8.00 G	-

STD: Standard









## POWER TRAX HD



POWER TRAX HD is a premium bias-ply tire that is specially designed for forklifts and skid steers in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
									Rec./Flange Height	Alt./Flange Height
<b>15"</b> 8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	227	710	-	-	7.00	7 BD
8.25 - 15	TT	14	-	STD	248	845	-	-	6.50	7.0
8.25 - 15	TT	16	-	STD	248	845	-	-	6.50	7.0
10.00L - 15 (36 X 11 - 15)	TT	16	-	STD	285	918	-	-	7.50 BD	7.5
10.00L - 15 (36 X 11 - 15)	TT	24	-	STD	285	918	-	-	7.50 BD	7.5
250 - 15 (250/70 - 15)	TT	16	-	STD	240	745	-	-	7.50	7.0
250 - 15 (250/70 - 15)	TT	18	-	STD	240	745	-	-	7.50	7.0
250 - 15 (250/70 - 15)	TT	20	-	STD	240	745	-	-	7.50	7.0
300 - 15 (315/70 - 15)	TT	20	-	STD	300	845	-	-	8.00	-

STD: Standard



Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index



# MULTIUSE TIRES



## POWER TRAX HD



POWER TRAX HD is a premium bias-ply tire that is specially designed for forklifts and skid steers in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
									Rec./Flange Height	Alt./Flange Height
<b>16.5"</b> 10 - 16.5	TL	10	-	STD	268	790	361	2331	8.25	-
12 - 16.5	TL	10	-	STD	324	865	391	2552	9.75	-
12 - 16.5	TL	12	-	STD	324	865	391	2552	9.75	-
12 - 16.5	TL	14	-	STD	324	865	391	2552	9.75	-
<b>20"</b> 10.00 - 20	TT	16	-	STD	285	1080	-	-	7.5	8.0
10.00 - 20	TT	18	-	STD	285	1080	-	-	7.5	8.0
10.00 - 20	TT	20	-	STD	285	1080	-	-	7.5	8.0
12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0
12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0

STD: Standard





Tolerances: O.D.  $\pm 2\%$  - S.W.  $\pm 2\%$  - RC  $\pm 2.5\%$   
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index



### Corporate Office

#### Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India  
 Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

#### BKT Europe srl

Viale Della Repubblica, 133  
 20831 Seregno (MB), Italy  
 Tel: (+39) 0362 33 03 28  
 (+39) 0362 32 51 07  
 Fax: (+39) 0362 23 24 72

#### BKT USA Inc. (AG Division)

2660 West Market St. Suite 100  
 Fairlawn (Akron) OH 44333, USA  
 Tel: (+1) 330 836 1090  
 Fax: (+1) 330 836 1091  
 Toll Free: (+1) 888 660 0662

#### BKT Tires, Inc. (OTR Division)

12 Cadillac Drive, Suite 240  
 Brentwood, Tennessee 37027, USA  
 Toll Free: (+1) 844 258 8473  
 Fax: (+1) 888 290 1804

#### BKT Tires (CANADA) Inc.

55 York Street, Suite 401  
 Toronto, Ontario M5J 1R7, Canada  
 Tel: AG/IND (+1) 905 641 5636  
 OTR (+1) 780 888 5667  
 Fax: (+1) 416 229 1711