




TRACTOR & HARVESTER TIRES



AGRIMAX FORCE (R-1W)

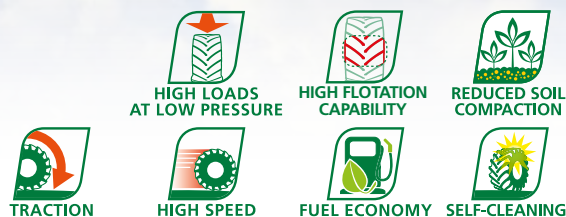

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for agriculture applications with high-power tractors, ensuring top performance and efficiency. AGRIMAX FORCE is a really comfortable tire for both field operations and road transfers; it actually allows to move without the need for increasing the inflation pressure.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
		Rec.	Alt.							
 28"	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	603	1551	694	4654	725	STD
 30"	IF 600/70 R 30	165 D	DW 21 B; DW 21 A	DW 20 A; DW 20 B	603	1602	708	4767	750	STD
	IF 710/60 R 30	168 D	DW 25 B	-	708	1614	714	4814	750	STD
 34"	IF 600/70 R 34	167 D	DW 21 B; DW 21 A	DW 20 A; DW 20 B	603	1704	757	5070	800	STD
	IF 650/65 R 34	161 D	DW 23 B	-	650	1710	764	5078	825	STD
	IF 710/60 R 34	170 D	DW 25 B	-	708	1716	763	5137	825	STD
 38"	IF 900/60 R 38	184 D	DW 30 A; DW 30 B	TW 31 B	916	2045	904	5995	975	STD
 42"	IF 650/85 R 42	180 D	DW 21 B	DW 23 B; DW 20 B	650	2173	965	6400	1025	STD
	IF 710/70 R 42	179 D	DW 25 B	-	716	2061	919	6200	975	STD
	IF 710/75 R 42	181 D	DW 25 B	-	716	2133	950	6350	1025	STD
	IF 900/60 R 42	186 D	DW 30 B	TW 30 B	916	2147	950	6457	1025	STD

STD: Standard



AGRIMAX FORTIS (R-1W)



TRACTION



HIGH LOAD CAPACITY



REDUCED SOIL COMPACTION



DURABILITY



FUEL ECONOMY



HANDLING



COMFORT

AGRIMAX FORTIS is your reliable partner for all preparation, planting and soil treatment operations. Designed to equip the latest, most modern and most powerful tractors, AGRIMAX FORTIS allows you to carry very high loads maximizing your business productivity.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
		Rec.	Alt.							
 30"	600/70 R 30	158 D/161 A8	 DW 20 B	 DW 18 L; W 18 L	 611	 1602	 724	 4810	 750	STD
 34"	600/70 R 34	160 D/163 A8	 DW 18 L	 DW 20 B; W 18 L	 611	 1704	 761	 5109	 800	STD
 38"	650/85 R 38	173 D/176 A8	 DW 23 B	 DW 21 B; DW 20 B	 675	 2071	 935	 6184	 975	STD
	800/70 R 38	178 D/181 A8	 DW 25 B	 DW 23 B; DW 27 B	 798	 2085	 912	 6202	 975	STD
 42"	710/75 R 42	175 D/172 E	 DW 23 B	 DW 25 B	 716	 2133	 970	 6375	 1025	STD

STD: Standard



Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Tractor



AGRIMAX SIRIO (R-1W)



AGRIMAX SIRIO is the new high-speed tire (up to 70 km/h) developed by BKT for high-powered tractors. It has been designed to provide best performance both on the road and in the field. The high sidewall flexibility ensures outstanding comfort to improve the driving experience.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
30" 540/65 R 30	150 D/147 E	W 16 L	W 18	530	1464	669	4400	700	HS
IF 600/70 R 30	165 D/162 E	DW 21 B	DW 20 B	603	1602	713	4739	750	HS
34" 540/65 R 34	152 D/149 E	W 16 L	W 18	530	1566	721	4735	750	HS
38" 540/65 R 38	153 D/150 E	W 16 L	W 18 L	530	1667	769	5050	800	HS
710/70 R 38	171 D/168 E	DW 23 B	-	716	1959	887	5917	925	HS

HS: High speed version



AGRIMAX RT 657 (R-1W)



AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
16" 320/65 R 16	117 D/120 A8	W 10	W 9; W 11	319	822	366	2466	390	STD
18" 320/65 R 18	109 A8/B	W 10	W 9; W 11	319	873	392	2587	410	STD
340/65 R 18	113 A8/B	W 11	W 10; W 12	343	899	400	2667	425	STD

STD: Standard



AGRIMAX RT 657 (R-1W)



COMFORT



HANDLING



FUEL ECONOMY



HIGH LOAD CAPACITY



TRACTION



REDUCED SOIL COMPACTION



HIGH SPEED

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
20"									
340/65 R 20	124 D/127 A8	W 11	W 10; W 12	343	950	430	2892	450	STD
420/65 R 20	135 D/138 A8	W 13	W 11; W 12	418	1054	468	3162	500	STD
440/65 R 20	138 D/141 A8	W 14 L	W 1; W 15 L	441	1080	479	3240	525	STD
24"									
420/65 R 24	138 D/141 A8	W 13	W 11; W 12	418	1156	519	3468	550	STD
440/65 R 24	135 D/138 A8	W 14 L	W 13; W 15 L	441	1182	538	3546	575	STD
480/65 R 24	140 D/143 A8	W 15 L	W 14 L	479	1234	562	3730	600	STD
540/65 R 24	146 D/149 A8	W 16 L	W 18 L	530	1312	590	3930	625	STD
28"									
440/65 R 28	138 D/141 A8	W 14 L	W 13; W 15 L	441	1283	590	3878	625	STD
480/65 R 28	142 D/145 A8	W 15 L	W 14 L	479	1335	610	4058	650	STD
540/65 R 28	149 D/152 A8	W 16 L	W 18 L	530	1413	643	4253	675	STD
600/65 R 28	154 D/157 A8	DW 20 B	W 18 L	611	1491	670	4470	700	STD
30"									
540/65 R 30	150 D/153 A8	W 16 L	W 18 L	530	1464	670	4403	700	STD
600/65 R 30	155 D/158 A8	DW 20 B	W 18 L	611	1542	697	4609	725	STD
34"									
540/65 R 34	152 D/155 A8	W 16 L	W 18 L	530	1566	712	4742	750	STD
600/65 R 34	157 D/160 A8	DW 20 B	W 18 L	611	1644	742	4960	775	STD
38"									
540/65 R 38	153 D/156 A8	W 16 L	W 18 L	530	1667	760	5059	800	STD
600/65 R 38	159 D/162 A8	DW 20 B	W 18 L	611	1745	790	5247	825	STD
650/65 R 38	163 D/166 A8	DW 20 B	-	645	1811	830	5483	875	STD
42"									
650/65 R 42	165 D/168 A8	DW 20 B	-	645	1913	878	5824	925	STD

STD: Standard

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



AGRIMAX RT 765 (R-1W)



AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
16"									
200/70 R 16	94 A8/B	W 6	-	197	686	313	2058	330	STD
220/70 R 16	94 A8/B	W7	-	221	715	324	2145	330	STD
240/70 R 16	104 A8/B	W 8	W 8 L; W 9 L	244	742	335	2226	350	STD
260/70 R 16	109 A8/B	W 8	W 8 L; W 9 L	258	770	346	2310	360	STD
280/70 R 16	112 A8/B	W 9	W 8; W 8 L; W 10	282	798	356	2370	390	STD
18"									
280/70 R 18	114 A8/B	W 9	W 8; W 10	282	849	381	2520	410	STD
20"									
260/70 R 20	113 A8/B	W 8	9; W 9	258	872	402	2639	410	STD
280/70 R 20	116 A8/B	W 9	W 10	282	900	408	2705	425	STD
300/70 R 20	120 A8/B	W 9	W 10	295	952	428	2854	450	STD
320/70 R 20	123 A8/B	W 10	W 9; W 11	319	982	445	2965	475	STD
360/70 R 20	129 A8/B	W 11	W 10; W 12	357	1042	469	3122	500	STD
380/70 R 20	132 A8/B	W 12	W 11; W 13	380	1082	482	3213	525	STD
24"									
320/70 R 24	116 A8/B	W 10	W 9; W 11	319	1094	502	3245	525	STD
360/70 R 24	122 A8/B	W 11	W 10; W 12	357	1152	519	3400	550	STD
380/70 R 24	125 A8/B	W 12	W 11; W 13	380	1190	538	3560	575	STD
420/70 R 24	130 A8/B	W 13	W 12; W 14 L	418	1248	554	3680	600	STD
480/70 R 24	138 A8/B	W 15 L	W 14 L; W 16 L	479	1316	580	3894	625	STD
28"									
360/70 R 28	125 A8/B	W 11	W 10; W 12	357	1251	579	3767	600	STD
380/70 R 28	127 A8/B	W 12	W 11; W 13	380	1293	586	3883	625	STD
420/70 R 28	133 A8/B	W 13	W 12; W 14 L	418	1349	604	4020	650	STD
480/70 R 28	140 A8/B	W 15 L	W 14 L; W 16 L	479	1421	634	4183	675	STD

STD: Standard



AGRIMAX RT 765 (R-1W)



AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
		Rec.	Alt.							
30"	420/70 R 30	134 A8/B	W 13	W 12; W 14 L	418	1398	631	4172	675	STD
	480/70 R 30	141 A8/B	W 15 L	W 14 L; W 16 L	479	1478	659	4322	700	STD
	600/70 R 30	152 A8/B	DW 20 B	DW 18 L; W 18 L	591	1602	711	4774	750	STD
34"	480/70 R 34	149 A8/B	W 15 L	W 14 L; W 16 L	479	1580	711	4759	750	STD
	520/70 R 34	148 A8/B	W 16 L	W 15 L; W 18 L	516	1640	739	4901	775	STD
38"	480/70 R 38	145 A8/B	W 15 L	W 14 L; W 16 L	479	1681	764	5015	800	STD
	520/70 R 38	150 A8/B	W 16 L	W 15 L; W 18 L	516	1749	793	5300	825	STD
	580/70 R 38	155 A8/B	W 18 L	-	577	1827	821	5505	875	STD
	580/70 R 38	180 A8	W 18 L	-	577	1827	821	5505	875	SB
	620/70 R 38	170 A8/B	DW 20 B	-	625	1833	828	5591	875	STD
	710/70 R 38	166 A8/B	DW 23 B	-	716	1959	859	5751	925	STD
	710/70 R 38	178 A8/B	DW 23 B	-	716	1959	859	5751	925	STD
42"	620/70 R 42	160 A8/B	DW 20 B	-	625	1935	876	5742	925	STD
	620/70 R 42	166 A8/B	DW 20 B	-	625	1935	876	5742	925	STD
	710/70 R 42	173 A8/B	DW 23 B	-	716	2061	922	6174	975	STD
	710/70 R 42	173 D/176 A8	DW 23 B	-	716	2061	922	6174	975	STD
46"	620/70 R 46	162 A8/B	DW 20 B	-	625	2036	906	6047	975	STD

STD: Standard

SB: Steel Belted Version ^①

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



AGRIMAX RT 855 (R-1W)



TRACTION



SELF-CLEANING



DURABILITY



COMFORT

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
16" 180/95 R 16 (6.50 R 16)	105 A8/B	5.5 F	6.0 F	185	760	340	2265	360	STD
210/95 R 16 (7.50 R 16)	106 A8/B	W 6.5	W 6; W 7	209	806	360	2415	390	STD
18" 210/95 R 18 (7.50 R 18)	108 A8/B	W 7	W 6	214	855	385	2565	410	STD
20" 210/90 R 20 (8.3 R 20)	110 A8/B	W 7	W 6	211	890	412	2681	425	STD
210/95 R 20 (7.50 R 20)	110 A8/B	W 7	W 6	214	908	418	2749	450	STD
250/85 R 20 (9.5 R 20)	116 A8/B	W 8	W 7; W 9	250	940	424	2812	450	STD
280/85 R 20 (11.2 R 20)	112 A8/B	W 10	W 9	292	984	441	2952	475	STD
320/85 R 20 (12.4 R 20)	119 A8/B	W 11	W 9; W 10	329	1052	467	3100	500	STD
24" 250/85 R 24 (9.5 R 24)	109 A8/B	W 8	W 7; W 9	251	1036	475	3104	500	STD
280/85 R 24 (11.2 R 24)	115 A8/B	W 10	W 9	292	1086	492	3224	525	STD
320/85 R 24 (12.4 R 24)	122 A8/B	W 11	W 9; W 10	329	1154	518	3424	550	STD
340/85 R 24 (13.6 R 24)	125 A8/B	W 12	W 11	353	1188	531	3540	575	STD
380/85 R 24 (14.9 R 24)	131 A8/B	W 12	W 11; W 13	380	1256	554	3699	600	STD
420/85 R 24 (16.9 R 24)	137 A8/B	W 15 L	W 14 L; W 13	438	1324	582	3900	625	STD
28" 250/85 R 28 (9.5 R 28)	112 A8/B	W 8	W 7; W 9	251	1137	519	3421	550	STD
280/85 R 28 (11.2 R 28)	118 A8/B	W 10	W 9	292	1187	545	3558	575	STD
320/85 R 28 (12.4 R 28)	124 A8/B	W 11	W 9; W 10	329	1255	569	3743	600	STD
340/85 R 28 (13.6 R 28)	127 A8/B	W 12	W 11	353	1289	588	3890	625	STD
380/85 R 28 (14.9 R 28)	133 A8/B	W 12	W 11; W 13	380	1357	606	4015	650	STD
420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 13; W 14 L	438	1425	638	4214	675	STD

STD: Standard



AGRIMAX RT 855 (R-1W)



AGRIMAX RT 855 is a tire featuring excellent traction and comfort proprieties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
		Rec.	Alt.							
30"	380/85 R 30 (14.9 R 30)	135 A8/B	W 12	W 11; W 13	380	1408	633	4169	675	STD
	420/85 R 30 (16.9 R 30)	140 A8/B	W 15 L	W 13; W 14 L	438	1475	661	4393	700	STD
	460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 14 L; W 15 L	475	1544	682	4537	725	STD
32"	320/85 R 32 (12.4 R 32)	126 A8/B	W 11	W 9; W 10	329	1357	621	4081	650	STD
	320/85 R 34 (12.4 R 34)	141 A8/B	W 11	W 9; W 10	329	1408	645	4280	675	STD
	380/85 R 34 (14.9 R 34)	137 A8/B	W 12	W 11; W 13	380	1509	682	4504	725	STD
34"	420/85 R 34 (16.9 R 34)	142 A8/B	W 15 L	W 13; W 14 L	438	1578	709	4677	750	STD
	460/85 R 34 (18.4 R 34)	147 A8/B	W 16 L	W 14 L; W 15 L	475	1646	721	4865	775	STD
	320/85 R 36 (12.4 R 36)	128 A8/B	W 11	W 9; W 10	329	1458	672	4404	700	STD
36"	340/85 R 36 (13.6 R 36)	132 A8/B	W 12	W 11	353	1492	689	4507	725	STD
	320/85 R 38 (12.4 R 38)	143 A8/B	W 10	W 9; W 11; DW 11	319	1509	700	4580	725	STD
	340/85 R 38 (13.6 R 38)	133 A8/B	W 12	W 11	353	1543	712	4613	750	STD
38"	380/85 R 38 (14.9 R 38)	139 A8/B	W 12	W 11; W 13	380	1611	736	4841	775	STD
	420/85 R 38 (16.9 R 38)	144 A8/B	W 15 L	W 13; W 14 L	438	1679	763	4992	800	STD
	460/85 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 14 L; W 15 L	475	1747	785	5161	825	STD
	480/80 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 14 L; W 15 L	475	1747	785	5161	825	STD
	520/85 R 38 (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	813	5393	875	STD
	520/85 R 38 (20.8 R 38)	170 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	813	5393	875	STD

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



AGRIMAX RT 855 (R-1W)



AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
42"									
480/80 R 42 (18.4 R 42)	151 A8/B	W 16 A; DD 16; DW 16 A	DD 16 L; DW 16 L; W 16 L	479	1835	835	5459	875	STD
520/85 R 42 (20.8 R 42)	157 A8/B	DW 16 A; W 16 A; DD 16	DW 18 A; DD 18; W 18 A; DD 18 L	516	1951	858	5735	925	STD
520/85 R 42 (20.8 R 42)	167 A8/B	DW 16 A; W 16 A; DD 16	DW 18 A; DD 18; W 18 A; DD 18 L	516	1951	858	5735	925	STD
46"									
420/80 R 46 (16.9 R 46)	151 D/162 A2	W 13	W 12	418	1840	863	5619	875	STD
420/80 R 46 (16.9 R 46)	159 D/170 A2	W 13	W 12	418	1840	863	5619	875	STD
480/80 R 46 (18.4 R 46)	158 A8/B	DW 16 A; W 16 A; DD 16	W 16 L; DD 16 L; DW 16 L	479	1936	895	5871	925	STD
480/80 R 46 (18.4 R 46)	164 A8/B	DW 16 A; W 16 A; DD 16	W 16 L; DD 16 L; DW 16 L	479	1936	895	5871	925	STD
520/85 R 46 (20.8 R 46)	158 A8/B	DW 16 L; W 16 A; W 16 L; DD 16	DW 18 L; W 18 L; W 18 A	516	2052	949	6252	975	STD
520/85 R 46 (20.8 R 46)	173 A8/B	DW 16 L; W 16 A; W 16 L; DD 16	DW 18 L; W 18 L; W 18 A	516	2052	949	6252	975	STD
50"									
480/80 R 50 (18.4 R 50)	159 A8/B	DW 16 A	DW 15 A; W 15 A	479	2036	941	6158	975	STD
480/80 R 50 (18.4 R 50)	176 A8	DW 15 A	W 15 A; DW 16 A	479	2036	945	6228	975	SB

STD: Standard

SB: Steel Belted



AGRIMAX SPARGO (R-1)



AGRIMAX SPARGO is the special BKT tire for row crop applications. It has been designed for enhanced productivity in the fields and preserving the soil in the long term. The tire provides excellent self-cleaning features in addition to higher load capacity at standard pressure. AGRIMAX SPARGO ensures an outstanding traction along with strong stability both in the fields and during road transfers.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
38" VF 380/85 R 38	161 D	W 13	W 12	380	1602	730	4830	775	STD
46" VF 380/90 R 46	173 D	DW 13 A	W 13 A; DW 12	390	1852	846	5611	875	STD

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



AGRIMAX RT 945 (R-1W)



TRACTION



SELF-CLEANING



STABILITY



DURABILITY



FIELD PROTECTION

AGRIMAX RT 945 is specially designed for row crops: it does not damage the crops and preserves the yield. Excellent self-cleaning features allow for a quick change from field operations to road usage, where AGRIMAX RT 945 shows brilliant performance. It is suitable for compact utility tractors in municipality and maintenance applications.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
42" 320/90 R 42 (12.4 R 42)	139 A8/B	W 10	W 9; W 11	319	1643	760	4944	800	STD
46" 320/90 R 46 (12.4 R 46)	146 A8/B	W 10	W 9; W 11	319	1744	810	5232	825	STD
380/90 R 46 (14.9 R 46)	155 A8/B	W 12	W 11; W 13	380	1852	859	5596	875	STD
380/90 R 46 (14.9 R 46)	159 A8/B	W 12	W 11; W 13	380	1852	859	5596	875	STD
50" 320/90 R 50 (12.4 R 50)	150 A8/B	W 10	W 9; W 11	319	1846	873	5618	875	STD
380/90 R 50 (14.9 R 50)	151 A8/B	W 12	W 11; W 13	380	1954	913	5902	975	STD
54" 320/90 R 54 (12.4 R 54)	155 A8/B	W 10	W 9; W 11	319	1948	930	5987	925	STD
380/90 R 54 (14.9 R 54)	158 A8/B	W 12	W 11; W 13	380	2056	962	6296	1025	STD

STD: Standard





AGRIMAX RT 955 (R-1)



TRACTION



SELF-CLEANING



STABILITY



DURABILITY



FIELD PROTECTION

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
24" 210/90 R 24 (8.3 R 24)	107 A8/B	W 7	W 6	214	1010	462	3027	500	STD
28" 210/95 R 28 (8.3 R 28)	116 A8/B	W 7	W 6	214	1111	513	3333	550	STD
32" 210/95 R 32 (8.3 R 32)	120 A8/B	W 7	W 6	214	1213	571	3703	575	STD
230/95 R 32 (9.5 R 32)	128 A8/B	W 8	W 7	238	1251	585	3792	600	STD
270/95 R 32 (11.2 R 32)	136 A8/B	W 9	W 8; W 10	275	1327	614	4044	625	STD
36" 230/95 R 36 (9.5 R 36)	130 A8/B	W 8	W 7	238	1352	639	4112	650	STD
270/95 R 36 (11.2 R 36)	139 A8/B	W 9	W 8; W 10	275	1428	665	4368	675	STD
38" 270/95 R 38 (11.2 R 38)	140 A8/B	W 9	W 8; W 10	275	1479	697	4510	700	STD
42" 230/95 R 42 (9.5 R 42)	133 A8/B	W 8	W 7	238	1506	714	4633	725	STD
300/85 R 42 (11.2 R 42)	144 A8/B	W 9	W 10; W 11	295	1577	745	4850	750	STD
44" 210/95 R 44 (8.3 R 44)	120 A8/B	W 7	W 6	214	1518	716	4554	725	STD
230/95 R 44 (9.5 R 44)	134 A8/B	W 8	W 7	238	1556	739	4788	750	STD
270/95 R 44 (11.2 R 44)	142 A8/B	W 9	W 8; W 10	275	1632	764	4983	775	STD

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



AGRIMAX RT 955 (R-1)



TRACTION



SELF-CLEANING



STABILITY



DURABILITY

FIELD
PROTECTION

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
46"									
270/95 R 46 (11.2 R 46)	143 A8/B	W 9	W 8; W 10	275	1683	786	5049	800	STD
300/95 R 46 (12.4 R 46)	148 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1738	812	5318	825	STD
300/95 R 46 (12.4 R 46)	148 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1738	812	5318	825	SPL
340/85 R 46 (13.6 R 46)	150 A8/B	W 12	W 11	353	1746	811	5238	825	STD
48"									
230/95 R 48 (9.5 R 48)	136 A8/B	W 8	W 7	238	1656	792	5085	800	STD
270/95 R 48 (11.2 R 48)	144 A8/B	W 9	W 8; W 10	275	1733	820	5351	825	STD
340/85 R 48 (13.6 R 48)	152 A8/B	W 12	W 11	353	1797	855	5572	875	STD
52"									
300/95 R 52 (12.4 R 52)	151 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1891	889	5822	925	STD
54"									
270/95 R 54 (11.2 R 54)	146 A8/B	W 9	W 8; W 10	275	1885	878	5815	925	STD

STD: Standard

SPL: Special Version



AGRIMAX ELOS (R-2)



AGRIMAX ELOS has been designed to enhance top traction performance even under particularly awkward operating conditions on wet terrains such as paddy fields or marshland. The tread design has been especially developed to ensure optimum self-cleaning properties, which are essential for operations on muddy land and during transfers. To optimize the farmers' productivity reducing machine downtime, sidewall protectors have been integrated into the design of the AGRIMAX ELOS tire to ensure maximum protection against possible damages at any time.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
28" 420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 13; W 14 L	438	1467	665	4349	700	STD
38" 340/85 R 38 (13.6 R 38)	133 A8/B	W 12	W 11	353	1602	735	4774	775	STD
380/85 R 38 (14.9 R 38)	139 A8/B	W 12	W 11; W 13	380	1662	772	4994	775	STD
420/85 R 38 (16.9 R 38)	144 A8/B	W 15 L	W 13; W 14 L	438	1735	784	5056	825	STD
42" 480/80 R 42 (18.4 R 42)	151 A8/B	DW 16 L	DD 16 L; W 16 L	489	1890	857	5600	875	STD
520/85 R 42 (20.8 R 42)	157 A8/B	DW 16 L	DD 18 L; DW 18 L	516	1988	904	5865	925	STD

STD: Standard



RT 853 (R-1)



RT 853 is an entry level R1 tire for tractors and vineyard harvesters in soil tillage and vineyard harvesting applications.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
38" 480/80 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 15 L; W 14 L	475	1747	781	5256	825	STD
520/85 R 38 (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	830	5592	875	STD

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Tractor



RT 857 (R-1)



RT 857 is a road-oriented tire for haulage operations as well as for soil tillage and vineyard harvesting applications. Its strong casing along with polyester belts offers excellent driving comfort and puncture resistance. Its stubble-resistant tread compound features high cut and chip resistance.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
26" 420/85 R 26 (16.9 R 26)	135 A8/B	DW 15 L	W 15 L; W 16 L; DW 16 L	438	1374	616	4115	650	STD
460/85 R 26 (18.4 R 26)	143 A8/B	DW 15 L	W 15 L; W 16 L; DW 16 L	465	1442	642	4297	675	STD
28" 320/85 R 28 (12.4 R 28)	124 A8/B	W 11	W 9; W 10	329	1255	577	3779	600	STD
340/85 R 28 (13.6 R 28)	127 A8/B	W 12	W 11	353	1289	599	3908	625	STD
380/85 R 28 (14.9 R 28)	133 A8/B	W 12	W 11; W 13	390	1357	617	4127	650	STD
420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 14 L; W 13	450	1425	640	4276	675	STD
30" 420/85 R 30 (16.9 R 30)	140 A8/B	W 15 L	W 14 L; W 13	438	1476	656	4398	700	STD
460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 15 L; W 14 L	475	1544	682	4601	725	STD

STD: Standard





RIDEMAX IT 696



RIDEMAX IT 696 has a unique tread design that provides excellent grip for road applications, even in winter conditions. It is best suitable for transport and municipality/maintenance applications also thanks to its high-speed feature. The tread design has been specially developed to ensure excellent self-cleaning properties and a low rolling resistance.


SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
		Rec.	Alt.							
										
24"	300/80 R 24 (11.2 R 24)	133 A8/128 D	DW 10	-	295	1090	501	3296	525	STD
	340/80 R 24 (12.4 R 24)	140 A8/135 D	DW 11	W 10; W 12; DW 10	343	1154	521	3444	550	STD
	400/80 R 24 (14.9 R 24)	149 A8/144 D	DW 13	W 12; W 14 L	404	1250	558	3760	600	STD
28"	400/80 R 28 (14.9 R 28)	151 A8/146 D	W 13	W 12; W 14 L	404	1352	615	4048	650	STD
	440/80 R 28 (16.9 R 28)	156 A8/151 D	W 14 L	W 15 L	441	1415	634	4248	675	STD
30"	440/80 R 30 (16.9 R 30)	157 A8/153 D	W 14 L	W 15 L	441	1466	668	4456	700	STD
	480/80 R 30 (18.4 R 30)	162 A8/157 D	W 15 L	W 16 L	479	1530	673	4558	725	STD
34"	440/80 R 34 (16.9 R 34)	159 A8/155 D	W 14 L	W 15 L	441	1567	704	4714	750	STD
	480/80 R 34 (18.4 R 34)	164 A8/159 D	W 15 L	W 16 L	479	1632	728	4894	775	STD
38"	480/80 R 38 (18.4 R 38)	166 A8/161 D	W 15 L	W 16 L	479	1733	780	5213	825	STD

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



RIDEMAX IT 697

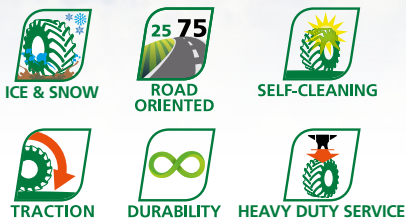

RIDEMAX IT 697 M+S represents the best response to the needs of modern farming contractors during winter operations. This winter tire for tractors ensures perfect grip for all operations on icy and snowy land without the need of snow chains being mounted. Thanks to the tread grooves and the special mix, a tractor can be driven in full stability, comfort and with maximum control at low temperatures even on roads that are both difficult and dangerous due to snow and ice.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
30" 540/65 R 30	161 A8/156 D	W 16 L	W 18	530	1464	661	4434	700	STD

STD: Standard





TR 126 (R-1)



TRACTION



SUITABLE FOR
MUDDY GROUND



SELF-CLEANING

TR 126 is designed to fit small tractors in soil tillage operations and is particularly suitable on muddy ground. The deep lugs and the tread pattern provide excellent traction and outstanding self-cleaning features providing best tire performance in all operating conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
14" 6 - 14	5 JA ; 5 KB	-	157	655	305	1965	STD	4	TT	66 A6
7 - 14	5 JA ; 5 KB	-	170	690	320	2070	STD	4	TT	72 A6

STD: Standard



TR 133 (R-1)



TRACTION



DURABILITY



COMFORT



SELF-CLEANING

TR 133 has been specially designed for harvesters, tractors, sprayers and trailers in harvesting, soil tillage and spraying applications. It features excellent traction and outstanding comfort as well as enhanced self-cleaning properties. TR 133 provides an extended tire life-cycle.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
38" 13.6 - 38 (14.00 - 38)	W 12	W 11	350	1580	735	4843	STD	10	TT	-

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



TR 135 (R-1)



TRACTION



STABILITY



SELF-CLEANING



COMFORT

CUT & CHIP
RESISTANCE

DURABILITY



HEAVY DUTY SERVICE

SPECIAL
COMPOUND

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
20" 8.00 - 20	5.50 F	-	225	965	448	2837	STD	6	TT	105 A6
8.00 - 20	5.50 F	-	225	965	448	2837	STD	8	TT	111 A6
9.5 - 20	W 8	W 7	240	955	444	2808	STD	6	TT	102 A6
9.5 - 20	W 8	W 7	240	955	444	2808	STD	8	TT	107 A6
9.5 - 20	W 8	W 7	240	955	444	2808	HD	8	TT	107 A6
10.00 - 20	7.5	-	280	1075	495	3160	STD	10	TT	152 A2
11.2 - 20	W 10	W 9; 9	292	1020	477	3000	STD	8	TT	111 A6
12.4 - 20	W 11	W 9; 9; W 10; 11	325	1075	500	3160	STD	8	TT	116 A6
24" 8.3 - 24	W 7	W 6	211	995	469	2925	STD	6	TT	100 A6
8.3 - 24	W 7	W 6	211	995	469	2925	STD	8	TT	105 A6
8.3 - 24	W 7	W 6	211	995	469	2925	HD	8	TT	105 A6
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	6	TT	106 A6
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	8	TT	112 A6
9.5 - 24	W 8	W 7	232	1056	494	3217	HD	8	TT	112 A6
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	10	TT	116 A6
9.5 - 24	W 8	W 7	232	1056	494	3217	HD	10	TT	116 A6
11.2 - 24	W 10	W 9	284	1105	515	3249	STD	6	TT	110 A6
11.2 - 24	W 10	W 9	284	1105	515	3249	STD	8	TT	116 A6

STD: Standard

HD: Heavy Duty Version ①



TR 135 (R-1)



TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
24" 11.2 - 24	W 10	W 9	284	1105	515	3249	HD	8	TT	116 A6
11.2 - 24	W 10	W 9	284	1105	515	3249	HD	10	TT	120 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	6	TT	115 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	8	TT	121 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	8	TL	121 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	HD	8	TT	121 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	HD	8	TL	121 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	10	TT	125 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	12	TT	128 A6
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	SPL	12	TT	128 A6
13.6 - 24	W 12	W 11	345	1210	560	3557	STD	8	TT	123 A6
13.6 - 24	W 12	W 11	345	1210	560	3557	HD	8	TT	123 A6
13.6 - 24	W 12	W 11	345	1210	560	3557	STD	12	TT	130 A6
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	8	TT	128 A6
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	8	TL	128 A6
14.9 - 24	W 13	W 11; W 12	378	1265	583	3719	HD	8	TT	128 A6
14.9 - 24	W 13	W 11; W 12	378	1265	583	3719	HD	10	TL	132 A6
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	12	TT	135 A6

HD: Heavy Duty Version ①

SPL: Special Version ②

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



TR 135 (R-1)



TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
24"										
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	12	TL	135 A6
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	8	TT	133 A6
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	8	TT	133 A6
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	10	TT	136 A6
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	12	TT	140 A6
26"										
14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	STD	8	TT	129 A6
14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	HD	8	TT	129 A6
14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	STD	12	TT	136 A6
16.9 - 26	W 15 L	W 14 L	430	1380	636	4054	STD	10	TT	137 A6
16.9 - 26	W 15 L	W 14 L	430	1380	636	4054	STD	12	TT	140 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	12	TL	153 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	12	TT	153 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	12	TL	153 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	14	TL	156 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	16	TL	159 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	16	TT	159 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	16	TL	159 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB HD	16	TL	159 A6
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	18	TT	161 A6

STD: Standard

HD: Heavy Duty Version ①

DB: Dual Bead Version

DB HD: Dual Bead Heavy Duty Version ③



TR 135 (R-1)



TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
28" 8.3 - 28	W 7	W 6	213	1104	523	3246	STD	6	TT	103 A6
8.3 - 28	W 7	W 6	213	1104	523	3246	STD	8	TT	108 A6
9.5 - 28	W 8	W 7	235	1155	542	3381	STD	6	TT	108 A6
9.5 - 28	W 8	W 7	235	1155	542	3381	STD	8	TT	114 A6
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	8	TT	118 A6
11.2 - 28	W 10	W 9	284	1205	565	3543	HD	8	TT	118 A6
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	10	TT	122 A6
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	6	TT	117 A6
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	8	TT	123 A6
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	HD	8	TT	123 A6
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	10	TT	127 A6
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	12	TT	131 A6
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	8	TT	125 A6
13.6 - 28	W 12	W 11	345	1310	614	4031	HD	8	TT	125 A6
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	12	TT	134 A6
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	14	TT	137 A6
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	6	TT	125 A6
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	8	TT	130 A6
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	HD	8	TT	130 A6

STD: Standard

HD: Heavy Duty Version ①

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Tractor



TR 135 (R-1)



TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
28"										
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	12	TT	137 A6
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	14	TT	139 A6
18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	8	TL	138 A6
18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	12	TL	147 A6
30"										
7.2 - 30	W 6	-	185	1095	523	3219	STD	6	TT	95 A6
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	6	TT	109 A6
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	8	TT	115 A6
14.9 - 30	W 13	W 11; W 12	378	1415	659	4316	STD	8	TT	131 A6
15 - 30 (18.4 - 30)	W 16 L	W 15 L	460	1545	714	4542	STD	12	TT	149 A6
15 - 30 (18.4 - 30)	W 16 L	W 15 L	460	1545	714	4542	STD	14	TT	151 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	8	TT	137 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	10	TT	139 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	14	TT	146 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	8	TT	139 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	8	TT	139 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	10	TT	145 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	10	TT	145 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	10	TL	145 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	12	TT	149 A6

STD: Standard

HD: Heavy Duty Version ①



TR 135 (R-1)



TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning proprieties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
30" 18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	12	TL	149 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	12	TT	149 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	14	TT	151 A6
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	8	TT	146 A6
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	8	TL	146 A6
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	12	TT	155 A6
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	12	TL	155 A6
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	12	TT	155 A6
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	18	TT	164 A6
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	18	TL	164 A6
32" 8.3 - 32	W 7	W 6	211	1195	572	3585	STD	6	TT	105 A6
8.3 - 32	W 7	W 6	211	1195	572	3585	STD	8	TT	111 A6
9.5 - 32	W 8	W 7	235	1255	594	3686	STD	6	TT	110 A6
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	STD	6	TT	119 A6
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	STD	8	TT	124 A6
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	HD	8	TT	124 A6

STD: Standard
HD: Heavy Duty Version ①
DB: Dual Bead Version

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
LI/SS = Load Index / Speed Symbol;
S.W. = Section Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference;
SRI = Speed Radius Index



TR 135 (R-1)



TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
34" 16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	8	TT	139 A6
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	8	TT	139 A6
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	10	TT	142 A6
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	10	TT	142 A6
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	12	TT	144 A6
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	12	TT	144 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	6	TT	137 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	8	TT	142 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	8	TT	142 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	10	TT	146 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	10	TT	146 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	12	TT	151 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	12	TT	151 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD SPL	12	TT	151 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	14	TT	154 A6
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	14	TT	154 A6
23.1 - 34	DW 20 B; DW 20 A	-	585	1810	834	5321	STD	10	TT	153 A6
23.1 - 34	DW 20 B; DW 20 A	-	585	1810	834	5321	STD	10	TL	153 A6

STD: Standard

HD: Heavy Duty Version ①

HD SPL: Heavy Duty Special Version ④



TR 135 (R-1)



TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
36"										
8.3 - 36	W 7	W 6	211	1295	619	3807	STD	6	TT	107 A6
8.3 - 36	W 7	W 6	211	1295	619	3807	STD	8	TT	113 A6
9.5 - 36	W 8	W 7	235	1360	646	4000	STD	10	TT	122 A6
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	8	TT	126 A6
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	8	TT	126 A6
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	10	TT	131 A6
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	10	TT	131 A6
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	12	TT	135 A6
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	14	TT	139 A6
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	6	TT	125 A6
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	8	TT	129 A6
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	10	TT	134 A6
13.6 - 36	W 12	W 11	345	1515	713	4454	HD	10	TT	134 A6
38"										
12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	8	TT	127 A6
12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	14	TT	138 A6
12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	14	TL	138 A6
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	8	TT	131 A6
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	HD	8	TT	131 A6
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	12	TT	139 A6
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	HD	12	TT	139 A6
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	14	TT	142 A6

STD: Standard

HD: Heavy Duty Version ①

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Tractor



TR 135 (R-1)



TRACTION



STABILITY



SELF-CLEANING



COMFORT

CUT & CHIP
RESISTANCE

DURABILITY



HEAVY DUTY SERVICE

SPECIAL
COMPOUND

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
38" 14.00 - 38 (13.6 - 38)	W 12	W 11	345	1565	738	4601	STD	8	TT	131 A6
14.00 - 38 (13.6 - 38)	W 12	W 11	345	1565	738	4601	SPL	12	TT	139 A6
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	8	TT	133 A6
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	8	TT	133 A6
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	10	TT	138 A6
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	10	TT	138 A6
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	8	TT	141 A6
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	10	TT	143 A6
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	10	TT	143 A6
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	12	TT	146 A6
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	8	TT	143 A6
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	8	TT	143 A6
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TT	148 A6
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TL	148 A6

STD: Standard

HD: Heavy Duty Version ①

SPL: Special Version ②



TR 135 (R-1)



TRACTION



STABILITY



SELF-CLEANING



COMFORT



CUT & CHIP RESISTANCE



DURABILITY



HEAVY DUTY SERVICE



SPECIAL COMPOUND

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning proprieties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
38"										
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	12	TT	153 A6
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	12	TT	153 A6
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	8	TT	148 A6
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	12	TT	156 A6
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	HD	12	TT	156 A6
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	14	TT	160 A6
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	DB HD	16	TT	163 A6
42"										
9.5 - 42	W 8	W 7	246	1510	722	4440	STD	10	TT	125 A6
20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	STD	12	TT	157 A6

STD: Standard

HD: Heavy Duty Version ①

DB HD: Dual Bead Heavy Duty Version ③

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



TR 136 (R-1)



TRACTION



SELF-CLEANING

CUT & CHIP
RESISTANCE

HEAVY DUTY SERVICE ①

TR 136 has been developed by BKT to equip tractors and trailers in soil tillage and transport operations. This tire provides improved traction in all working conditions along with best cut and chip resistance to reduce machine downtime and increase your productivity.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
26"										
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TL	146 A6
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TT	146 A6
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	SPL	12	TL	146 A6
28"										
12.4 - 28	W 11	W 9; W 10	315	1275	595	3749	STD	8	TT	123 A6
30"										
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	8	TT	137 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	HD	8	TT	137 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	SPL	8	TT	137 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	10	TT	139 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	12	TT	143 A6
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	SPL	12	TT	143 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	STD	8	TT	139 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	8	TT	139 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	12	TT	149 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	SPL	12	TT	149 A6
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	14	TT	151 A6

STD: Standard

HD: Heavy Duty Version ①

SPL: Special Version



TR 144 (R-1)



TR 144 is suitable to equip small tractors to be used in soil tillage operations. It has been specially designed for wet conditions as you can find on wet and loose soil, and paddy fields. TR 144 ensures outstanding performance in all operating conditions which require both excellent traction and self-cleaning features. TR 144 is also available in a "special" version, which is best suitable for heavy-duty service.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
16" 7 - 16	6 L; 6 LB; 6.00 F	-	183	740	345	2217	STD	4	TT	75 A6
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	4	TT	83 A6
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	6	TT	91 A6
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	SPL	6	TT	91 A6
9.5 - 16	W 8 L	8 LB	245	850	392	2542	STD	6	TT	96 A6
9.5 - 16	W 8 L	8 L B	245	850	392	2542	STD	8	TT	102 A6
18" 8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	STD	4	TT	85 A6
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	STD	6	TT	94 A6
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	SPL	6	TT	94 A6
20" 8.3 - 20	W 7	W 6	211	890	414	2670	STD	6	TT	96 A6
22" 9.5 - 22	W 7	W 8	235	1000	458	2985	STD	6	TT	104 A6

SPL: Special Version ①
STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
LI/SS = Load Index / Speed Symbol;
S.W. = Section Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference;
SRI = Speed Radius Index



TR 171 (R-1W+)



TRACTION

SUITABLE FOR
MUDDY GROUND

SELF-CLEANING



DURABILITY



DEEP TREAD

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
12"										
5.00 - 12	3.00 D DT; 3.00 D	4 JA; 3.50 B	130	580	271	1731	STD	4	TT	61 A6
5.00 - 12	3.00 D DT; 3.00 D	4 JA; 3.50 B	130	580	271	1731	STD	6	TT	67 A6
6.00 - 12	4.00 E DT; 4.00 E	4 JA	160	635	293	1867	STD	6	TT	76 A6
16"										
9.5 - 16	W 8 L	8 LB	241	845	392	2499	STD	6	TT	96 A6
18"										
8 - 18	W 6	W 7; 5.50 F	190	845	390	2515	STD	4	TT	85 A6
8 - 18	W 6	W 7; 5.50 F	190	845	390	2515	STD	6	TT	94 A6
9.5 - 18	W 8	-	241	900	417	2646	STD	8	TT	105 A6
20"										
8.3 - 20	W 7	W 6	200	895	419	2670	STD	6	TT	96 A6
8.3 - 20	W 7	W 6	200	895	419	2670	STD	8	TT	101 A6
9.5 - 20	W 8	W 7	235	950	442	2835	STD	6	TT	101 A6
11.2 - 20	W 10	W 9; 9	285	1005	465	3000	STD	8	TT	113 A6
22"										
8.3 - 22	W 7	W 6	205	945	444	2778	STD	8	TT	104 A6
9.5 - 22	W 8	W 7	235	1005	469	2955	STD	8	TT	110 A6
24"										
8.3 - 24	W 7	W 6	200	990	470	2970	STD	6	TT	100 A6
8.3 - 24	W 7	W 6	200	990	470	2970	STD	8	TT	105 A6
9.5 - 24	W 8	W 7	236	1055	500	3080	STD	6	TT	106 A6
9.5 - 24	W 8	W 7	236	1055	500	3080	STD	8	TT	111 A6
11.2 - 24	W 10	W 9	285	1105	510	3270	STD	6	TT	110 A6
11.2 - 24	W 10	W 9	285	1105	510	3270	STD	8	TT	116 A6

STD: Standard



TR 171 (R-1W+)



TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
24"										
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	4	TT	106 A6
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	6	TT	115 A6
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	8	TT	120 A6
13.6 - 24	W 12	W 11	355	1210	562	3620	STD	6	TT	119 A6
13.6 - 24	W 12	W 11	355	1210	562	3620	STD	8	TT	123 A6
14.9 - 24	W 13	W 11; W 12	391	1265	584	3759	STD	6	TT	123 A6
14.9 - 24	W 13	W 11; W 12	391	1265	584	3759	STD	8	TT	128 A6
26"										
11.2 - 26	W 10	W 9	284	1155	540	3396	STD	8	TT	117 A6
12.4 - 26	W 11	W 10; W 9	315	1210	564	3557	STD	8	TT	121 A6
13.6 - 26	W 12	W 11	340	1270	589	3785	STD	4	TT	110 A6
13.6 - 26	W 12	W 11	340	1270	589	3785	STD	6	TT	120 A6
13.6 - 26	W 12	W 11	340	1270	589	3785	STD	8	TT	126 A6
28"										
12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	6	TT	117 A6
12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	8	TT	123 A6
12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	12	TT	131 A6
13.6 - 28	W 12	W 11	350	1300	607	3886	STD	4	TT	112 A6
13.6 - 28	W 12	W 11	350	1300	607	3886	STD	6	TT	121 A6
13.6 - 28	W 12	W 11	350	1300	607	3886	STD	8	TT	125 A6
13.6 - 28	W 12	W 11	350	1300	607	3886	STD	12	TT	134 A6
14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	STD	8	TT	130 A6
14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	STD	12	TT	137 A6
16.9 - 28	W 15 L	W 14 L	435	1440	665	4307	STD	8	TT	135 A6
16.9 - 28	W 15 L	W 14 L	435	1440	665	4307	STD	12	TT	143 A6

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Tractor



TR 171 (R-1W+)



TRACTION

SUITABLE FOR
MUDDY GROUND

SELF-CLEANING



DURABILITY



DEEP TREAD

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
30" 14.9 - 30	W 13	W 11; W 12	380	1415	659	4160	STD	8	TT	131 A6
16.9 - 30	W 15 L	W 14 L	430	1490	690	4455	STD	8	TT	137 A6
16.9 - 30	W 15 L	W 14 L	430	1490	690	4455	STD	12	TT	143 A6
18.4 - 30	W 16 L	W 15 L	470	1550	716	4557	STD	10	TT	145 A6
32" 12.4 - 32	W 11	W 9; W 10	315	1370	643	4028	STD	8	TT	124 A6
34" 16.9 - 34	W 15 L	W 14 L	429	1585	738	4740	STD	8	TT	139 A6
18.4 - 34	W 16 L	W 15 L	470	1655	768	4866	STD	10	TT	146 A6
36" 12.4 - 36	W 11	W 9; W 10	315	1470	691	4332	STD	8	TT	126 A6
13.6 - 36	W 12	W 11	345	1520	715	4469	STD	8	TT	129 A6
38" 13.6 - 38	W 12	W 11	345	1585	738	4601	STD	8	TT	131 A6
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6
18.4 - 38	W 16 L	W 15 L	470	1760	820	5174	STD	10	TT	148 A6

STD: Standard





FARM 2000 (R-1)



TRACTION



DURABILITY



HEAVY DUTY SERVICE

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
15.3" 260/70 - 15.3	9.00	-	265	775	349	2294	STD	-	TL	126 A8/114 A8
300/80 - 15.3	9.00	-	300	890	388	2608	STD	-	TL	132 A8/120 A8
16" 250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TT	125 A8/113 A8
250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TL	125 A8/113 A8
18" 8 - 18	W 6	-	195	840	390	2515	STD	4	TT	-
250/80 - 18	W 8	W 7; W 9	240	870	394	2566	STD	-	TT	127 A8/115 A8
250/80 - 18	W 8	W 7; W 9	240	870	394	2566	STD	-	TL	127 A8/115 A8
20" 8.3 - 20	W 7	-	210	895	417	2712	STD	4	TT	-
8.3 - 20	W 7	-	210	895	417	2712	STD	6	TT	-
28" 12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	8	TT	123 A6
12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	10	TT	127 A6
12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	12	TT	131 A6
13.6 - 28	W 12	W 11	345	1310	610	3851	STD	6	TT	121 A6
13.6 - 28	W 12	W 11	345	1310	610	3851	STD	8	TT	125 A6
13.6 - 28	W 12	W 11	345	1310	610	3851	STD	10	TT	130 A6
13.6 - 28	W 12	W 11	345	1310	610	3851	STD	12	TT	134 A6
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	8	TT	130 A6
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	10	TT	134 A6
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	12	TT	137 A6
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	14	TT	139 A6
16.9 - 28	W 15 L	W 14 L	429	1420	655	4310	STD	8	TT	135 A6
16.9 - 28	W 15 L	W 14 L	429	1420	655	4310	STD	12	TT	143 A6

STD: Standard

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



AS 2001 (R-1)



TRACTION



DURABILITY



HEAVY DUTY SERVICE

AS 2001 is a bias cross-ply tire which best suits tractors in farming and haulage operations. The particularly strong casing provides very high durability and makes the AS 2001 tire ideal for heavy-duty operations.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
26" 18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TT	142 A6
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TL	142 A6
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TT	146 A6
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TL	146 A6
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	14	TT	149 A6
28" 16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	8	TT	135 A6
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	10	TT	139 A6
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	12	TT	143 A6
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	12	TL	143 A6
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	SPL	12	TT	143 A6

STD: Standard

SPL: Special version



TRAC FARM (R-1)



TRAC FARM is a heavy-duty tire specifically designed for tractors and soil tillage applications. Its strong casing and the deep tread make the tire suitable for the most difficult operating conditions, ensuring the best return on investment during the entire product life-cycle.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
20" 11.2 - 20	W 10	W 9	290	1000	463	2940	STD	8	TT	111 A6
28" 12.4 - 28	W 11	W 9, W 10	320	1295	604	3807	STD	10	TT	124 A6
12.4 - 28	W 11	W 9 ; W 10	320	1295	604	3807	STD	12	TT	125 A6
13.6 - 28	W 12	W 11	365	1345	625	4089	STD	12	TT	128 A6
16.9 - 28	W 15 L	W 14 L	440	1435	663	4219	STD	12	TT	143 A6
30" 18.4 - 30	W 16 L	W 15 L	467	1550	716	4557	STD	12	TT	149 A6

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



TR 270 (R-2)



TR 270 is a tractor tire suitable for soil tillage applications. It is specially designed for providing maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning features. TR 270 perfectly meets all these characteristics.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
26"										
23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	8	TT	145 A6
23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	10	TT	149 A6
23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	12	TT	153 A6
23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	12	TL	153 A6
23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	14	TT	156 A6
30"										
18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	8	TT	139 A6
18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	8	TL	139 A6
18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	12	TT	149 A6
23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	8	TT	146 A6
23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	10	TT	151 A6
23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	12	TT	155 A6
34"										
18.4 - 34	DW 16 A; W 16 L	W 15 L	465	1682	771	5029	STD	8	TT	142 A6
18.4 - 34	DW 16 A; W 16 L	W 15 L	465	1682	771	5029	STD	12	TT	151 A6
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	8	TT	148 A6
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	10	TT	153 A6
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	12	TT	156 A6
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	14	TT	160 A6
38"										
18.4 - 38	W 16 A; W 16 L	W 15 L; DD 16	465	1784	822	5334	STD	8	TT	143 A6
18.4 - 38	W 16 A; W 16 L	W 15 L; DD 16	465	1784	822	5334	STD	12	TT	153 A6
20.8 - 38	W 18 A; W 18 L	DD 18; DW 18 A	530	1830	841	5472	STD	8	TT	148 A6
20.8 - 38	W 18 A; W 18 L	DD 18; W 18 A	530	1830	841	5472	STD	10	TT	151 A6
20.8 - 38	W 18 A; W 18 L	DD 18; W 18 A	530	1830	841	5472	STD	12	TT	156 A6

STD: Standard



TR 273 (R-2)



TR 273 is a tractor tire suitable for soil tillage and specifically designed to provide maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning properties. TR 273 perfectly meets all these characteristics.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
26" 23.1 - 26	DW 20 A; DW 20 B	-	590	1655	757	4998	STD	10	TT	149 A6
23.1 - 26	DW 20 A; DW 20 B	-	590	1655	757	4998	STD	12	TT	153 A6
30" 18.4 - 30	W 16 L	W 15 L	465	1585	723	4739	STD	12	TT	149 A6
23.1 - 30	DW 20 A; DW 20 B	-	590	1748	-	-	STD	10	TT	151 A6
34" 23.1 - 34	DW 20 A; DW 20 B	-	590	1850	-	-	STD	10	TT	153 A6

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Harvester



AGRIMAX TERIS



Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
26" 620/75 R 26	166 A8/B	DW 20 B	-	625	1590	730	4851	750	STD
750/65 R 26 (28L R 26)	166 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD
750/65 R 26 (28L R 26)	171 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD
30" 620/75 R 30	168 A8/B	DW 20 B	-	625	1710	779	5169	800	STD
32" 650/75 R 32	172 A8/B	DW 21 B	DW 20 B; DW 23 B	655	1789	794	5324	825	STD
800/65 R 32	178 A8/175 B	DW 27 B	DW 25 B; DH 27 B	818	1853	838	5587	875	STD
900/60 R 32	181 A8/178 B	DW 27 B	DW 28 B; DW 30 B	886	1893	840	5736	925	STD
900/60 R 32	185 A8/182 B	DW 27 B	DW 28 B; DW 30 B	886	1893	840	5736	925	STD
1050/50 R 32	184 A8/181 B	36.0 VA	-	1059	1893	840	5685	875	STD
34" IF 580/80 R 34 CFO	177 D	DW 20 B; DW 20 A	DW 21 A; DW 21 B	586	1792	810	5389	850	STD
42" 520/85 R 42	168 D	DW 16 L	DD 18 L	516	1951	890	5851	925	STD

STD: Standard



AGRIMAX RT 600



AGRIMAX RT 600 is the ideal tire for grassland, harvesting and spraying applications. Thanks to its large ground contact area, AGRIMAX RT 600 ensures an excellent pressure distribution and protects your soil preserving the productivity of your business.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		Rec.	Alt.						
32" 800/65 R 32 (30.5L R 32)	176 A8/173 B	DW 27 B	DH 27 B; DW 25 B	775	1820	823	5558	875	STD
800/65 R 32 (30.5L R 32)	181 A8/178 B	DW 27 B	DH 27 B; DW 25 B	775	1820	823	5558	875	STD
1050/50 R 32	184 A8/181 B	36.0 VA	-	1059	1863	826	5700	875	STD

STD: Standard



STAR TRAC



STAR TRAC is the BKT tire for harvesters at cotton farms, which is able to support heavy loads. Thanks to its particularly deep tread design, it ensures both excellent traction in the fields and excellent performance during road transfers. On cotton plantations showing the typical middle-sized shrubs, harvesting demands tire features like excellent flotation and reduced soil compaction. Moreover, the tire is made of a special compound providing high resistance against cuts and typical damages of this application.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
32" DW 500/95 D 32	13.00 DW	-	500	1836	809	5324	STD	-	TL	162 A8/169 A5
VA 500/95 D 32	13.00 VA	-	500	1836	809	5324	STD	-	TL	179 A8/186 A5

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Harvester



TR 137 (R-1)



TRACTION

HIGH FLOTATION
CAPABILITY

HEAVY DUTY SERVICE



COMFORT

HIGH LOAD
CAPACITYHIGH PUNCTURE
RESISTANCE

TR 137 is BKT's most suitable tire for all harvesting operations. It ensures high flotation capability along with low soil compaction and excellent traction in the field. The tire is available in different versions: the "aramid-belted" version provides better puncture resistance and protection against all typical damages of this application; the "HD" version is for high load capacity to improve today's farmers' requirements in terms of productivity.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
32" 24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	12	TL	159 A6
24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	14	TL	163 A6
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	12	TL	162 A6
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	14	TL	164 A6
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	16	TL	167 A6
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	AB	18	TL	170 A6
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	HD	18	TL	170 A6

STD: Standard

AB: Aramid Belted Version ①

HD: Heavy Duty Version ②





TR 882



TRACTION



HIGH LOAD
CAPACITY AT
STANDARD PRESSURE



AGRO-INDUSTRIAL
USE



CUT & CHIP
RESISTANCE



HEAVY DUTY SERVICE



HIGH PUNCTURE
RESISTANCE

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	138 A6/132 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	149 A6/143 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	18	TL	155 A6/149 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	155 A6/149 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	155 A6/149 A8

STD: Standard

AB: Aramid Belted Version ①

HD: Heavy Duty Version ②

SPL: Special Version ③

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Pivot Irrigator



TR 117 (R-1)



TR 117 is ideal for irrigation applications with pivot irrigators. In line with BKT's commitment to design tires that protect the soil, the TR 117 tire has round-shaped lugs to reduce soil damage and protect the precious crops.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
24" 11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TT	101 A6
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TL	101 A6
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TT	110 A6
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TL	110 A6
13.6 - 24	W 12	W 11	350	1187	-	-	STD	6	TT	119 A6
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	4	TT	112 A6
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	4	TL	112 A6
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	6	TT	123 A6
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	6	TL	123 A6
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	8	TT	128 A6
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	8	TL	128 A6
38" 11.2 - 38	W 10	W 9	284	1445	687	4248	STD	4	TT	109 A6
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	4	TL	109 A6
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	6	TT	117 A6
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	6	TL	117 A6

STD: Standard





TF 8181 (F-2)



HANDLING

FIELD
AND ROADCUT & CHIP
RESISTANCE

HEAVY DUTY SERVICE

ROAD
ORIENTED

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
15" 5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	142	655	307	1951	STD	4	TT	73 A6
5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	142	655	307	1951	STD	6	TT	82 A6
16" 4.00 - 16	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6
4.50 - 16	3.00 D	-	122	655	311	1952	STD	4	TT	73 A6
5.00 - 16	4.00 E	3.00 D; 4 J; 4½ J	140	680	322	2025	STD	4	TT	76 A6
5.00 - 16	4.00 E	3.00 D; 4 J; 4½ J	140	680	322	2025	STD	6	TT	84 A6
5.00 - 16	4.00 E	3.00 D; 4 J; 4½ J	140	680	322	2025	SPL	6	TT	84 A6
5.50 - 16	4.00 E	3.50 D; 4.50 E	158	720	340	2145	STD	6	TT	86 A6
5.50 - 16	4.00 E	3.50 D; 4.50 E	158	720	340	2145	SPL	6	TT	86 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	STD	6	TT	88 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	SPL	6	TT	88 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	STD	8	TT	94 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	SPL	8	TT	94 A6
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	STD	6	TT	91 A6
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	HD	8	TT	98 A6
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	SPL	10	TT	102 A6

STD: Standard

SPL: Special version ③

HD: Heavy Duty Version ①

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Front



TF 8181 (F-2)



HANDLING

FIELD
AND ROADCUT & CHIP
RESISTANCE

HEAVY DUTY SERVICE

ROAD
ORIENTED

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
16" 7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	6	TT	98 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	SPL	6	TT	98 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	8	TT	103 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	SPL	8	TT	103 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	10	TT	109 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	IMP	14	TT	122 A6
10.00 - 16	W 8	W 8 L	273	895	411	2667	STD	8	TT	115 A6
11.00 - 16	W 10 L	W 8; W 8 L	326	980	447	2920	STD	8	TT	118 A6
18" 7.50 - 18	5.50 F	-	208	875	410	2605	STD	6	TT	101 A6
7.50 - 18	5.50 F	-	208	875	410	2605	STD	8	TT	106 A6
19" 6.00 - 19	4.50 E	4.00 E; 5.00 F	165	814	385	2425	STD	6	TT	93 A6
20" 6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	STD	6	TT	97 A6
6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	STD	8	TT	101 A6
6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	SPL	8	TT	101 A6
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	6	TT	103 A6
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	8	TT	109 A6

STD: Standard

SPL: Special version ③

IMP: Implement ②

HD: Heavy Duty Version ①



TF 9090 (F-2)



TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
12" 4.00 - 12	3.00 D	2.50 C	112	530	255	1573	STD	4	TT	60 A6
4.00 - 12	3.00 D	2.50 C	112	530	255	1573	STD	6	TT	68 A6
15" 5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	140	655	307	1951	STD	4	TT	73 A6
5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	140	655	307	1951	STD	6	TT	82 A6
16" 4.00 - 16	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6
5.50 - 16	4.00 E	3.50 D; 4.50 E	150	710	332	2116	STD	6	TT	86 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	STD	6	TT	88 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	SPL	6	TT	88 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	STD	8	TT	94 A6
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	SPL	8	TT	94 A6
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	765	359	2280	STD	6	TT	91 A6
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	765	359	2280	STD	8	TT	98 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	6	TT	98 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	SPL	6	TT	98 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	8	TT	103 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	SPL	8	TT	103 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	10	TT	109 A6

SPL: Special version ①

STD: Standard

Tolerances: O.D. $\pm$ 2% - S.W. $\pm$ 2% - RC $\pm$ 2.5%
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



TF 9090 (F-2)



TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
16"										
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	STD	8	TT	111 A6
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	STD	10	TT	116 A6
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	SPL	10	TT	116 A6
10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	8	TT	115 A6
10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	8	TT	115 A6
10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	10	TT	119 A6
10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	10	TT	119 A6
11.00 - 16	W 10 L	W 8; W 8 L	320	970	448	2890	STD	8	TT	118 A6
11.00 - 16	W 10 L	W 8; W 8 L	320	970	448	2890	SPL	8	TT	118 A6
18"										
7.50 - 18	5.50 F	-	207	860	404	2562	STD	6	TT	101 A6
7.50 - 18	5.50 F	-	207	860	404	2562	SPL	6	TT	101 A6
7.50 - 18	5.50 F	-	207	860	404	2562	STD	8	TT	106 A6
7.50 - 18	5.50 F	-	207	860	404	2562	SPL	8	TT	106 A6
7.50 - 18	5.50 F	-	207	860	404	2562	STD	10	TT	113 A6
19"										
4.00 - 19	3.00 D	-	115	715	343	2145	STD	4	TT	72 A6
6.00 - 19	4.50 E	4.00 E; 5.00 F	167	815	386	2445	STD	6	TT	93 A6
20"										
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	6	TT	103 A6
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	8	TT	109 A6

SPL: Special version ①

STD: Standard



POWER RIB F2



POWER RIB F2 has been specially designed for 2WD tractors in soil tillage applications. This field-oriented tire is particularly suitable for all operations requiring a high level of handling comfort.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
15" 11L - 15 SL	8 LB	10 LB	279	813	374	2423	STD	8	TL	110 A6

STD: Standard



PRO RIB F2M (F-2M)



PRO RIB F2M is a field-oriented tire for 2WD tractors in soil tillage applications. It is particularly suitable for all operations requiring a high level of handling. It provides high flotation capability contributing to reduce soil compaction.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
15" 9.5L - 15 SL	7.00	8 LB	240	780	364	2325	STD	8	TL	102 A8
11L - 15 SL	8 LB	10 LB	280	795	370	2370	STD	8	TL	106 A8
16" 10.00 - 16 SL	8 LB	W 8 L	280	880	409	2620	STD	8	TT	110 A8
11.00 - 16 SL	10 LB	W 8 L; 8 LB	335	950	440	2830	STD	8	TT	114 A8
16.1" 14L - 16.1 SL	W 11 C	-	355	980	453	2920	STD	12	TL	127 A8

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index

Front



STEER FARM (F-2)



HEAVY DUTY SERVICE



DURABILITY

CUT & CHIP
RESISTANCE

STEER FARM has been designed for 2WD tractors in soil tillage applications as well as in-the-field and on-the-road transport. This tire features high cut and chip resistance and reduces stone retention making it suitable for all your heavy-duty service operations. STEER FARM has been specifically engineered for agricultural needs and is tested to provide an extended tire life-cycle.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
14" 5.20 - 14	3.50 D	4.00 E	135	625	-	-	STD	6	TT	-
16" 6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	740	345	2205	STD	8	TT	94 A6
6.50 - 16	4.50 E	4.00 E; 5.00 F; 5.50 F	185	770	-	-	STD	8	TT	98 A6
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	805	373	2391	STD	8	TT	103 A6
20" 6.50 - 20	5.50 F	4.00 E; 5.00 F	196	878	-	-	STD	8	TT	101 A6

STD: Standard



BK 823

BK 823 is a field-oriented tire mainly designed for 2WD tractors, implement machinery and trailers in transport and soil tillage applications. Its special block pattern makes the tire particularly suitable for heavy-duty service.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS
	Rec.	Alt.								
16" 9.00 - 16	6.5	-	245	891	394	2583	STD	12	TT	124 A8
9.00 - 16	6.5	-	245	891	394	2583	STD	14	TT	127 A8

STD: Standard

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$
 LI/SS = Load Index / Speed Symbol;
 S.W. = Section Width; O.D. = Overall Diameter;
 SLR = Static Loaded Radius; RC = Rolling Circumference;
 SRI = Speed Radius Index



Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
 Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica, 133
 20831 Seregno (MB), Italy
 Tel: (+39) 0362 33 03 28
 (+39) 0362 32 51 07
 Fax: (+39) 0362 23 24 72

BKT USA Inc. (AG Division)

2660 West Market St. Suite 100
 Fairlawn (Akron) OH 44333, USA
 Tel: (+1) 330 836 1090
 Fax: (+1) 330 836 1091
 Toll Free: (+1) 888 660 0662

BKT Tires, Inc. (OTR Division)

12 Cadillac Drive, Suite 240
 Brentwood, Tennessee 37027, USA
 Toll Free: (+1) 844 258 8473
 Fax: (+1) 888 290 1804

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
 Toronto, Ontario M5J 1R7, Canada
 Tel: AG/IND (+1) 905 641 5636
 OTR (+1) 780 888 5667
 Fax: (+1) 416 229 1711